



Kytkeä pistoliittimiin: Läpijohtotus. Integroitu Wago Winsta Midi -pistoliitin valaisimen molemmissa päädyissä. Välikaapelit myydään erikseen.

Connection to point connectors: Through-wiring. Integrated Wago Winsta Midi connector inside both ends of the luminaire. Interconnecting cables sold separately.

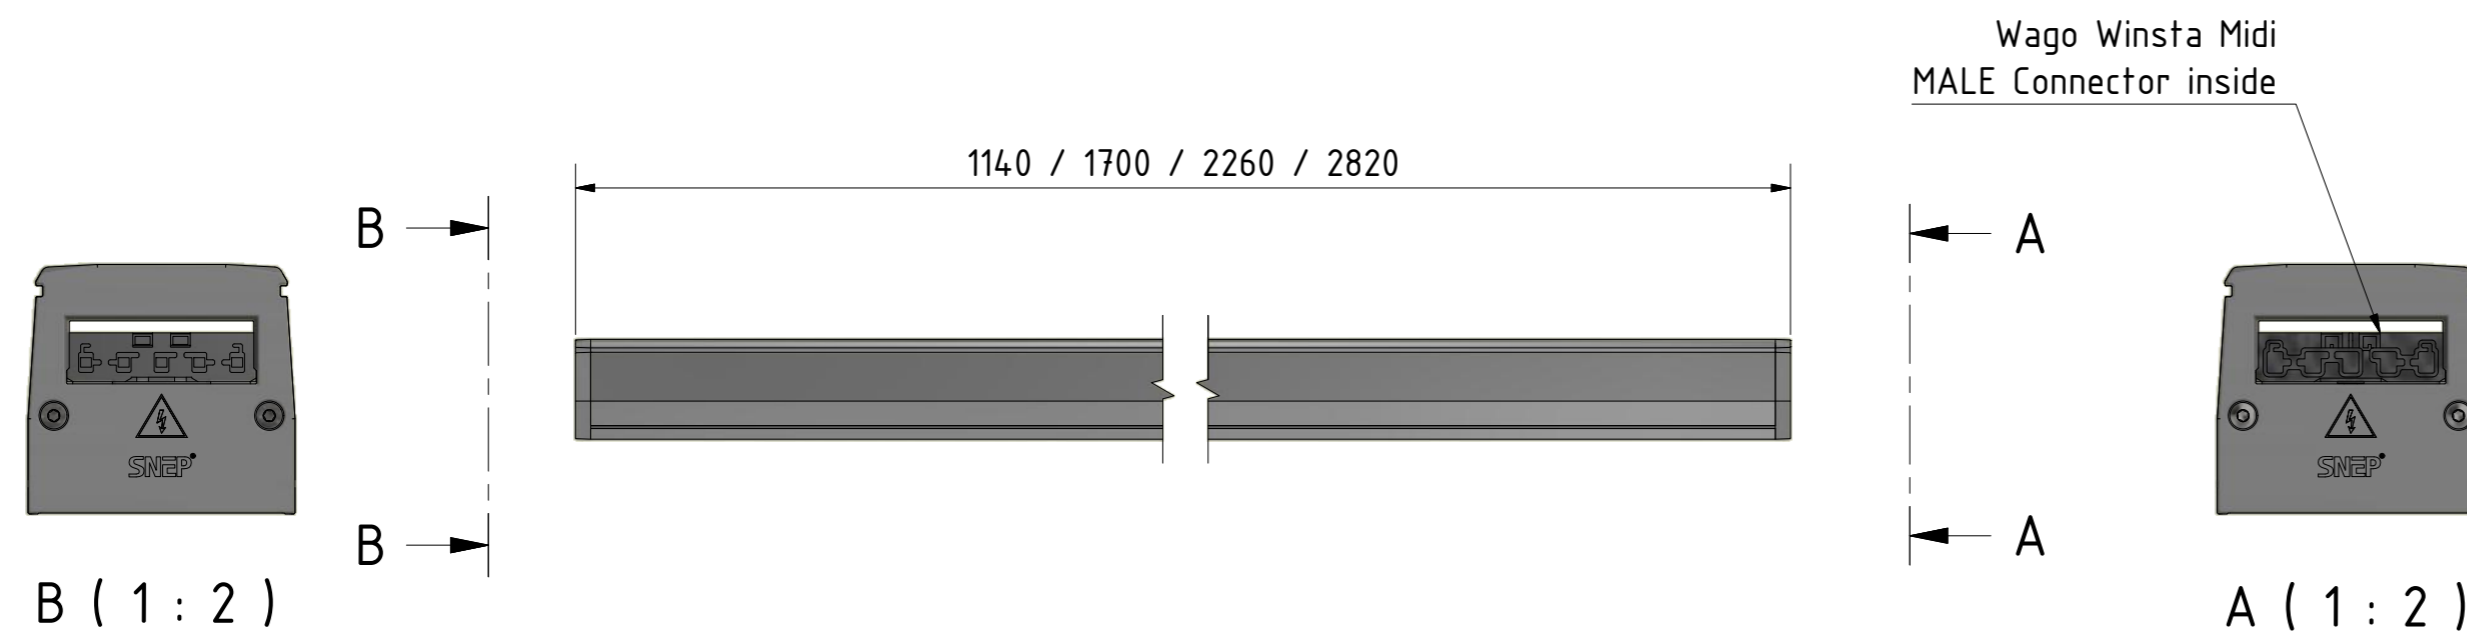

Saatavilla olevat välikaapelimitat:
Available interconnecting cable lengths:

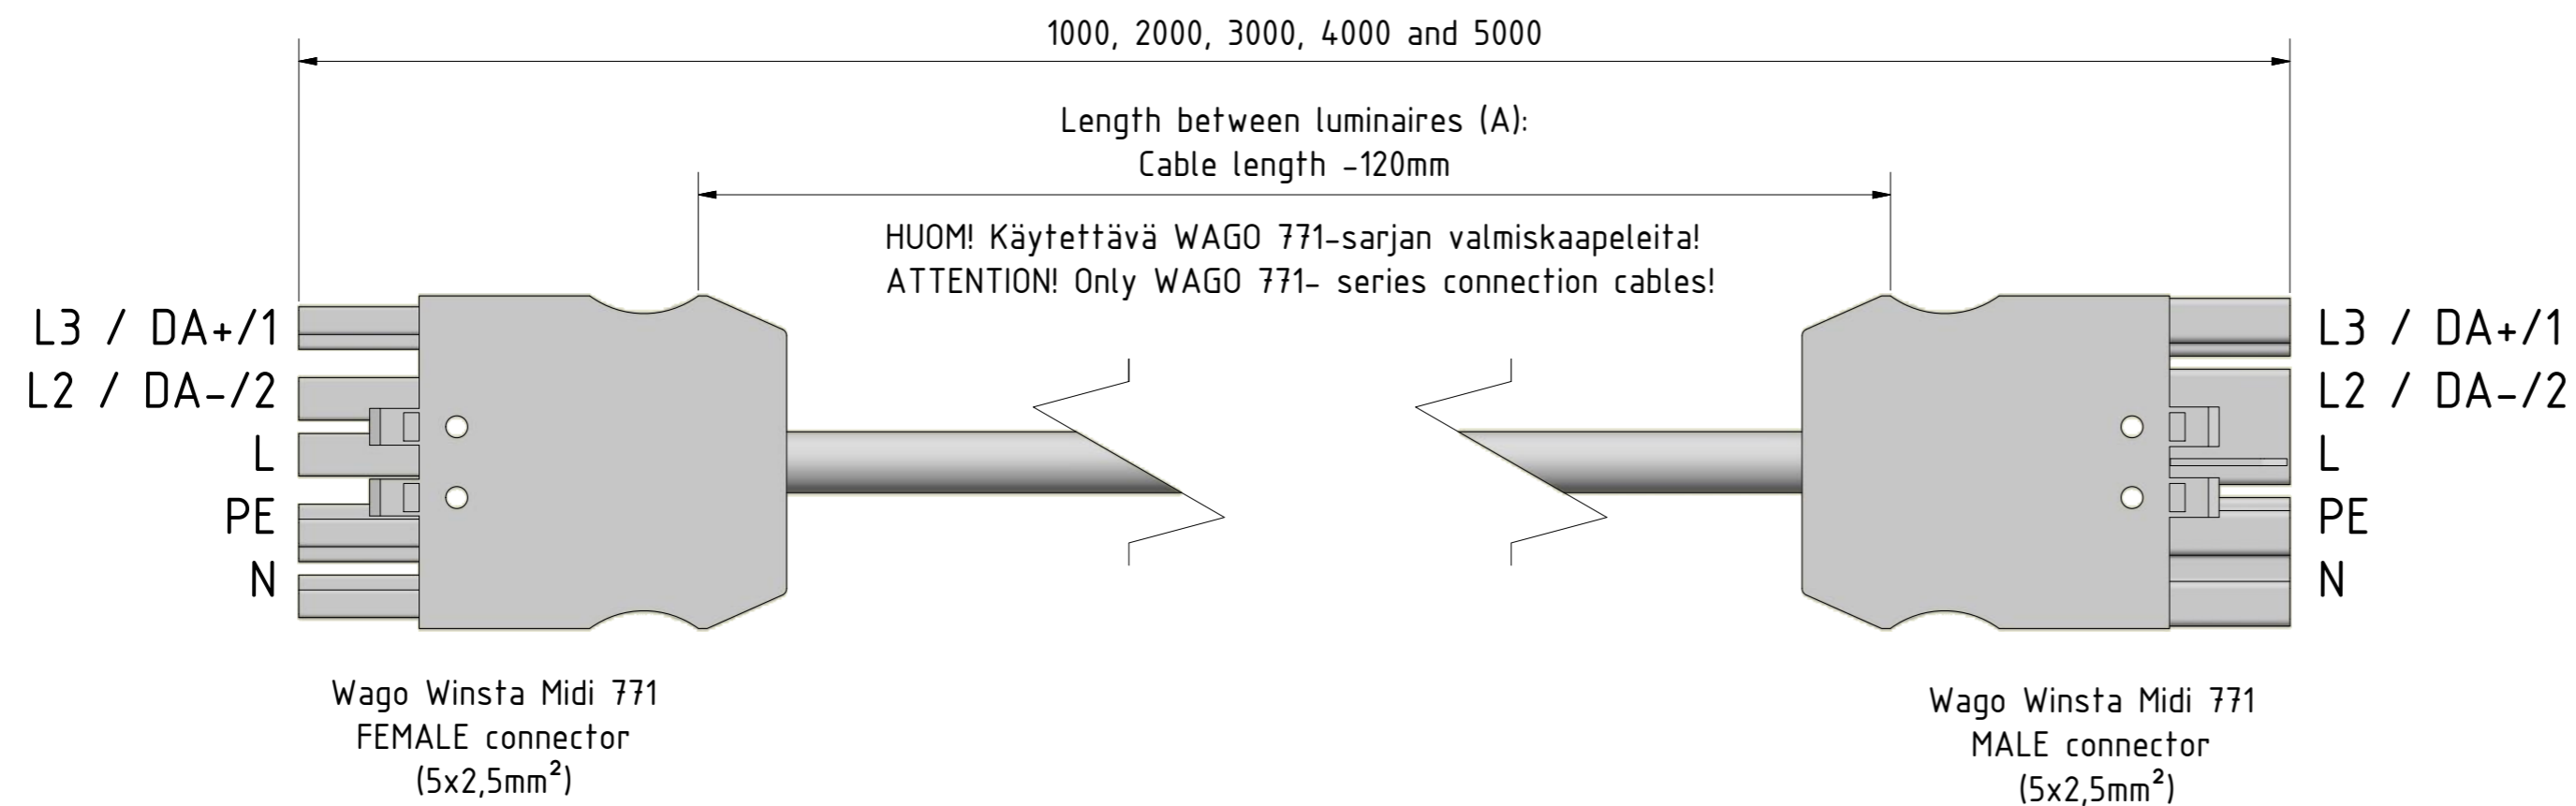


HUOM!
Pituus (A) on maksimimita, jonka kullakin kaapelilla voi saavuttaa.
On suositeltavaa jättää tarvittava pelivara asennukselle
(esim. jos kaapelia täytyy taivutella, kiertää esteitä tms.).

ATTENTION!
Length (A) is the absolut maximum through-wiring distance.
It is advised to leave some leeway for assembling
(e.g. if the cable needs to be bend etc.).

Pituus (A) toleranssi ±0,05m
The stated length (A) tolerance ±0,05m

Esimerkki läpijohtoksesta:
Through-wiring example:

(Mode C 4ft ja 3m välikaapeli; Winsta Midi 3m)
(Mode C 4ft with 3m connection cables; Winsta Midi 3m)

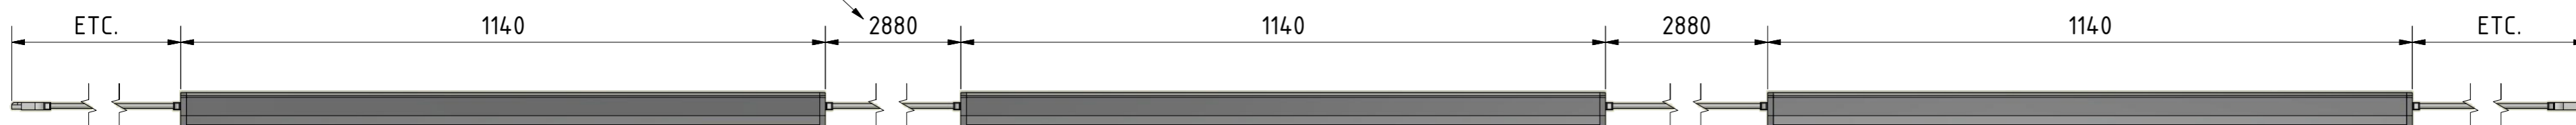

WAGO 771 Series Interconnecting Cables	
Code	Description
-W1W-	5x2,5mm ² , 1m
-W2W-	5x2,5mm ² , 2m
-W3W-	5x2,5mm ² , 3m
-W4W-	5x2,5mm ² , 4m
-W5W-	5x2,5mm ² , 5m
-W1W- HF	5x2,5mm ² , 1m HF
-W2W- HF	5x2,5mm ² , 2m HF
-W3W- HF	5x2,5mm ² , 3m HF
-W4W- HF	5x2,5mm ² , 4m HF
-W5W- HF	5x2,5mm ² , 5m HF
-W1W- DA	5x2,5mm ² , 1m DA
-W2W- DA	5x2,5mm ² , 2m DA
-W3W- DA	5x2,5mm ² , 3m DA
-W4W- DA	5x2,5mm ² , 4m DA
-W5W- DA	5x2,5mm ² , 5m DA
-W1W- HFDA	5x2,5mm ² , 1m HFDA
-W2W- HFDA	5x2,5mm ² , 2m HFDA
-W3W- HFDA	5x2,5mm ² , 3m HFDA
-W4W- HFDA	5x2,5mm ² , 4m HFDA
-W5W- HFDA	5x2,5mm ² , 5m HFDA

Wago cable insulation options	Code
MSK / PVC / H05VV-F 5G2.5	
MSK / PVC / H05VV-F 5G2.5	DA
MSK / HF / H05Z1Z1-F 5G2.5	HF
MSK / HF / H05Z1Z1-F 5G2.5	HFDA

DA = DALI
HF = Halogen-free
DAHf = DALI Halogen-free