


SNEP[®] MODE P - Environment prioritised

SNEP[®] MODE P is a sturdy aluminium-framed IP65-class general light designed for low spaces.


Sturdy SNEP[®] MODE P with its' wide light distribution is a natural choice to lit up parking halls, production facilities and warehouses. High IP-classification with broad ambient temperature range and wide range of light output enable the usage in great variety of sites. The luminaire is available in three lengths and comes with a broad set of connection and installation variants. The product was designed for quick and easy installation.

Product info


IP-class	IP65 / IP20 depending on the configuration
Mechanical impact resistance	IK08 / IK07
Protection class	I
Ambient temperature	Ta -25...+40°C / -40...+50°C depending on the selected power and electronic control gear versions
Voltage	200-240 Vac
Power Factor	>0.95
Frequency	0/50/60 Hz
Frame Structure	Frame recycled Purso Greenline aluminium profile, end caps durable and V0-classified flame retardant PC-plastics
Colour	Powder coated white (RAL9010) or Anodized grey
Optical cover / Optics	Prismatic PC-cover
CRI / CCT	<ul style="list-style-type: none">3000K CRI > 80, MacAdam 3 SDCM4000K CRI > 80, MacAdam 3 SDCM5000K CRI > 80, MacAdam 3 SDCM3000K CRI > 90, MacAdam 3 SDCM4000K CRI > 90, MacAdam 3 SDCM5000K CRI > 90, MacAdam 3 SDCM
Control	<ul style="list-style-type: none">On/OffDALIIndustrial ON/OFFIndustrial DALIConfigurable motion radar. Default setting 10min 100% lights from motion, 10min 30% after which 0% light. Corridor function possibility.Active Ahead IP65 Low Bay PIR and light. At presales. Please check out the availability from our sales!
Installation method	With SNEP® MODE-brackets
Lumen maintenance	L80B50>100 000h, L80B10>90 000h, L90B50>50 000h
Failure rate	100 000h / 10 %
Warranty	5-years.
Length	A 580 mm / 1140 mm/ 1420 mm, B 80 mm, C 85 mm, D=A+75 mm, E=A+85+85mm

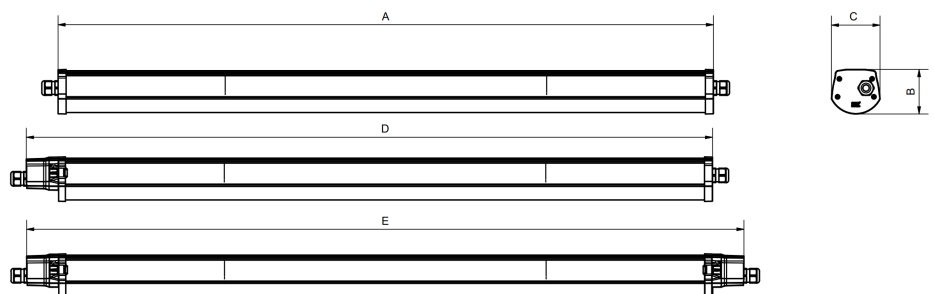










Classifications



Optics

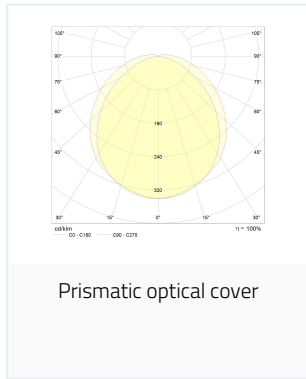


Connections

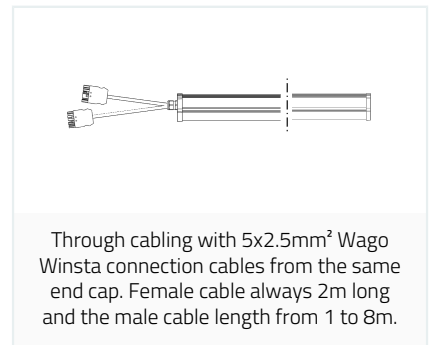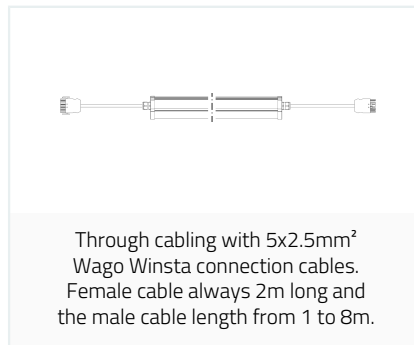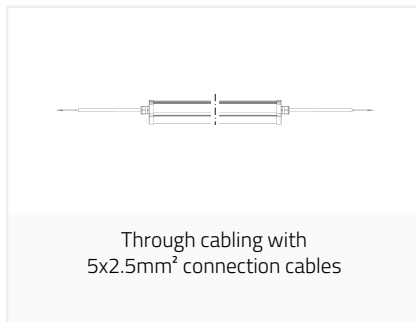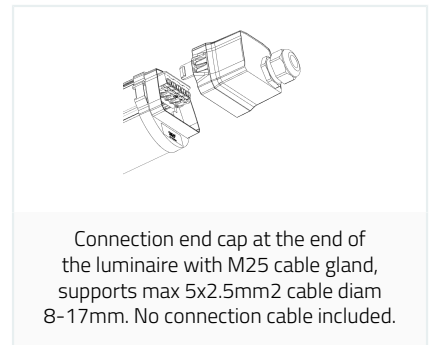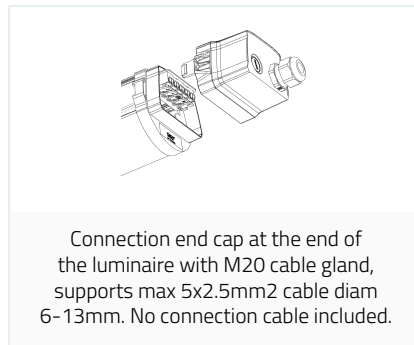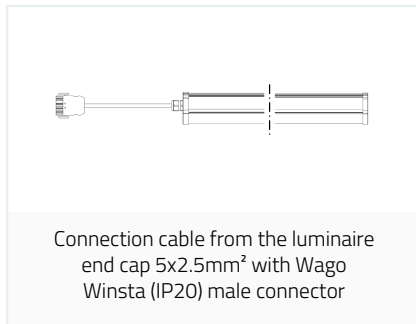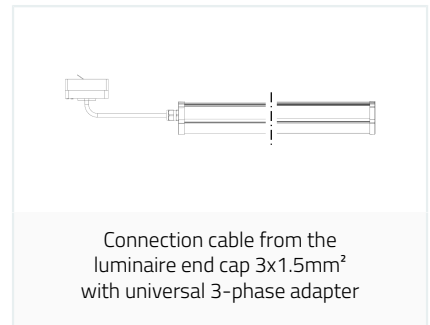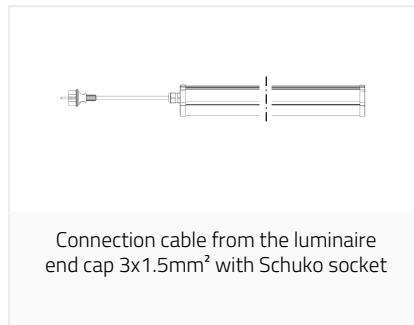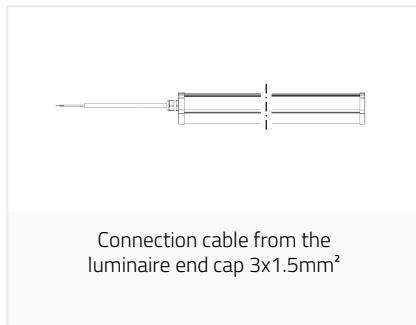





Through cabling from the same end cap with 5x2.5mm² connection cables

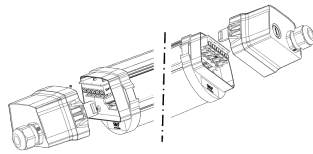


Through cabling through the connection end caps with M20 cable glands, supports max 5x2.5mm² cable diam 6-13mm. No connection cables included.

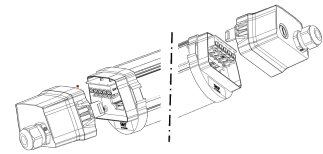


Through cabling through the connection end caps with M25 cable glands, supports max 5x2.5mm² cable diam 8-17mm. No connection cables included.




Through cabling with connection end cap on the one end and 5x2.5mm² connection cable at the other of the luminaire.



Through cabling through the connection end caps with M20 cable glands from the same end cap, supports max 5x2.5mm² cable diam 6-13mm. No connection cables included.



Through cabling through the connection end caps with M25 cable glands from the same end cap, supports max 5x2.5mm² cable diam 8-17mm. No connection cables included.

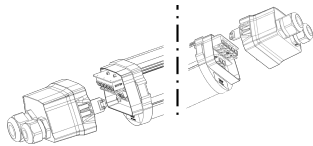

Through cabling through the connection end caps with terminal blocks supporting 7-pole max 7x2.5mm² cabling. No connection cables included. Cable glands M25 and M20, supporting cables diam 8-17mm and 6-13mm respectively.

Luminaires

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	580mm	85mm	80mm	1.5kg

Item	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P02 P0M	840LE 10W	1500	10	150	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 14W	1950	14	139	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 17W	2400	17	141	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 20W	2850	20	143	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840LE 23W	3250	23	141	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HE 22W	3400	22	155	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HE 27W	4100	27	152	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 34W	4950	34	146	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 39W	5600	39	144	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 42W	6050	42	144	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P02 P0M	840HO 46W	6450	46	140	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	1140mm	85mm	80mm	2.5kg

Item	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P04 P0M	840LE 16W	2400	16	150	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 19W	2950	19	155	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 25W	3900	25	156	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 32W	4800	32	150	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LE 38W	5650	38	149	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840LO 45W	6500	45	144	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 43W	6800	43	158	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 53W	8150	53	154	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HE 66W	9950	66	151	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO1 76W	11250	76	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO1 82W	12100	82	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P04 P0M	840HO2 89W	12950	89	146	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

Luminaires	CRI	CCT	Optics	Length	Width	Height	Weight
SNEP® MODE P	CRI > 80	4000K	P0M	1420mm	85mm	80mm	3.1kg

Item	Technical name	lm**	W**	lm/W**	Ta	Taind	Lifetime	Failure rate
P05 P0M	840LE 20W	3100	20	155	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 24W	3800	24	158	-25...+45°C	-40...+55°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 32W	5000	32	156	-25...+45°C	-40...+50°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LE 41W	6150	41	150	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LO 49W	7300	49	149	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840LO 58W	8400	58	145	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HE 55W	8750	55	159	-25...+40°C	-40...+45°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HE 67W	10500	67	157	-25...+40°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 84W	12800	84	152	-25...+35°C	-40...+40°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 96W	14450	96	151	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 105W	15550	105	148	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%
P05 P0M	840HO 113W	16650	113	147	-25...+35°C	-40...+35°C	L80B50 = 100 000h	100 000h / 10%

*Values are given in normal ambient temperature +25°C
 For non condensing environment or use
 Through cabling length tolerance from the luminaire ends ±10%
 Input power tolerance is ±5% and light output tolerance is ±7%