



Ajoneuvoprofiilit
Transport profiles

Actec automaatioprofiilit
Automation profiles

Purso Oy

Alumiinitie 1

FI-37200 Siuro, Finland

Tel. +358 (0)3 3404 111

purso@purso.fi

www.purso.fi

Sisällysluettelo

Table of contents

5	Laitaprofiilit	5	Dropside profiles
7	Laitaprofiilit 25mm	7	25mm Dropside profiles
14	Laitaprofiilit 30mm	14	30mm Dropside profiles
17	Laitasaranat	17	Dropside hinges
18	Sienimutterit	18	Rivet nuts
19	Koriprofiilit	19	Body profiles
23	Tippalistat	23	Drop trim profiles
25	Potkupellit	25	Kickplates
26	Autokorilistat	26	Car body mouldings
27	Lavarakenteet	27	Platform structure profiles
29	Lattiarakenteet	29	Floor structure profiles
33	Apurungot	33	Subframes
34	Alleajosuojat	34	Underrun protection profiles
39	Valopalkki	39	Light beam profile
42	Actec automaatio- profiilit	42	Automation profiles
45	Yleiset toimitusehdot	45	General terms


Laitaprofiilit

Dropside profiles




Laitaprofiilit


Dropside profiles

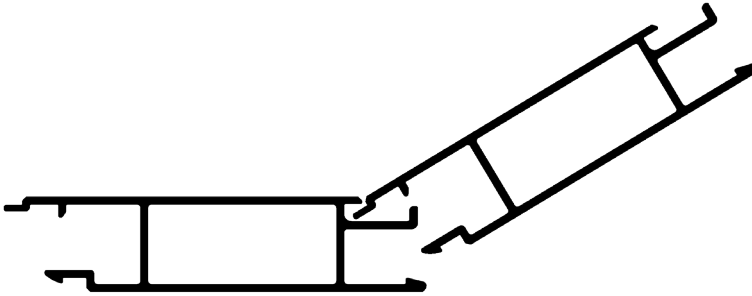

STEP 1

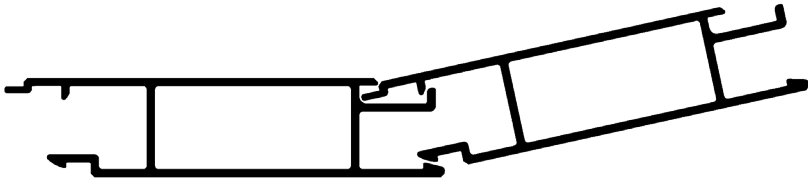

STEP 2



STEP 3

Laitaprofiilit

Dropside profiles

J07250



J15959

J15957

J16074




Laitaprofiilit 25 mm

Alaprofiilit

25 mm dropside profiles

Lower section

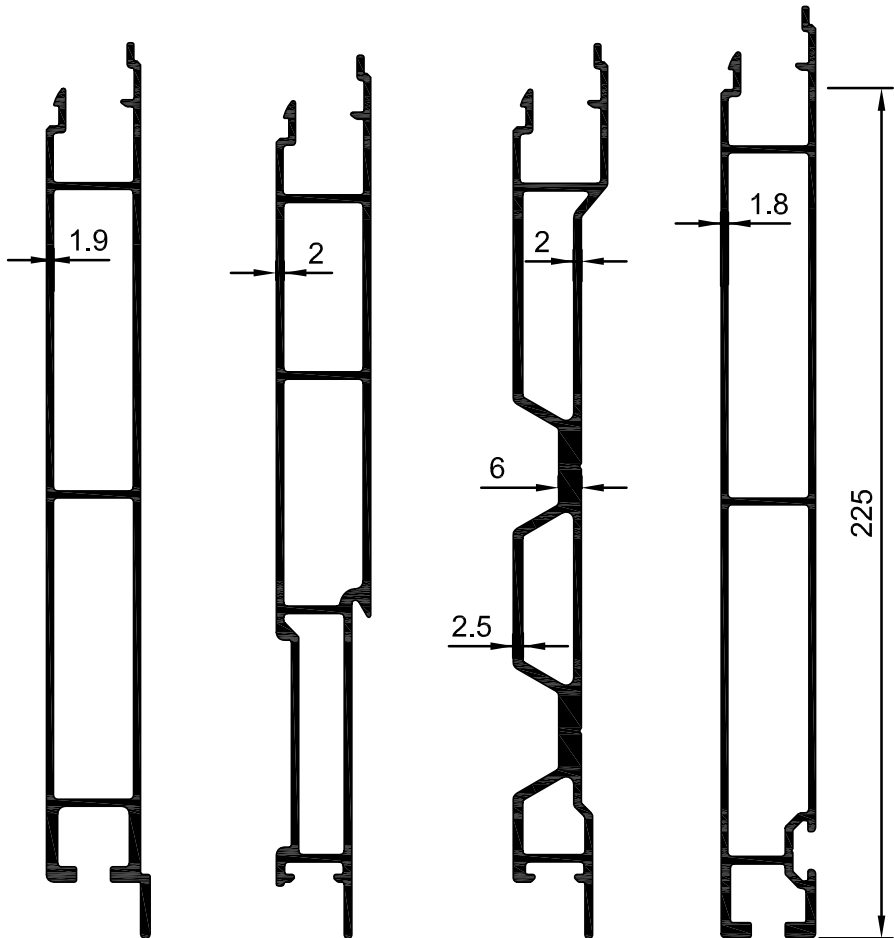

J16074
pm 645
kg/m 2.94


J16314
pm 612
kg/m 2.96

J16490
pm 631
kg/m 3.32

J15960
pm 680
kg/m 2.94

Laitaprofiilit 25 mm
Väliprofiilit

25 mm dropside profiles
Middle section

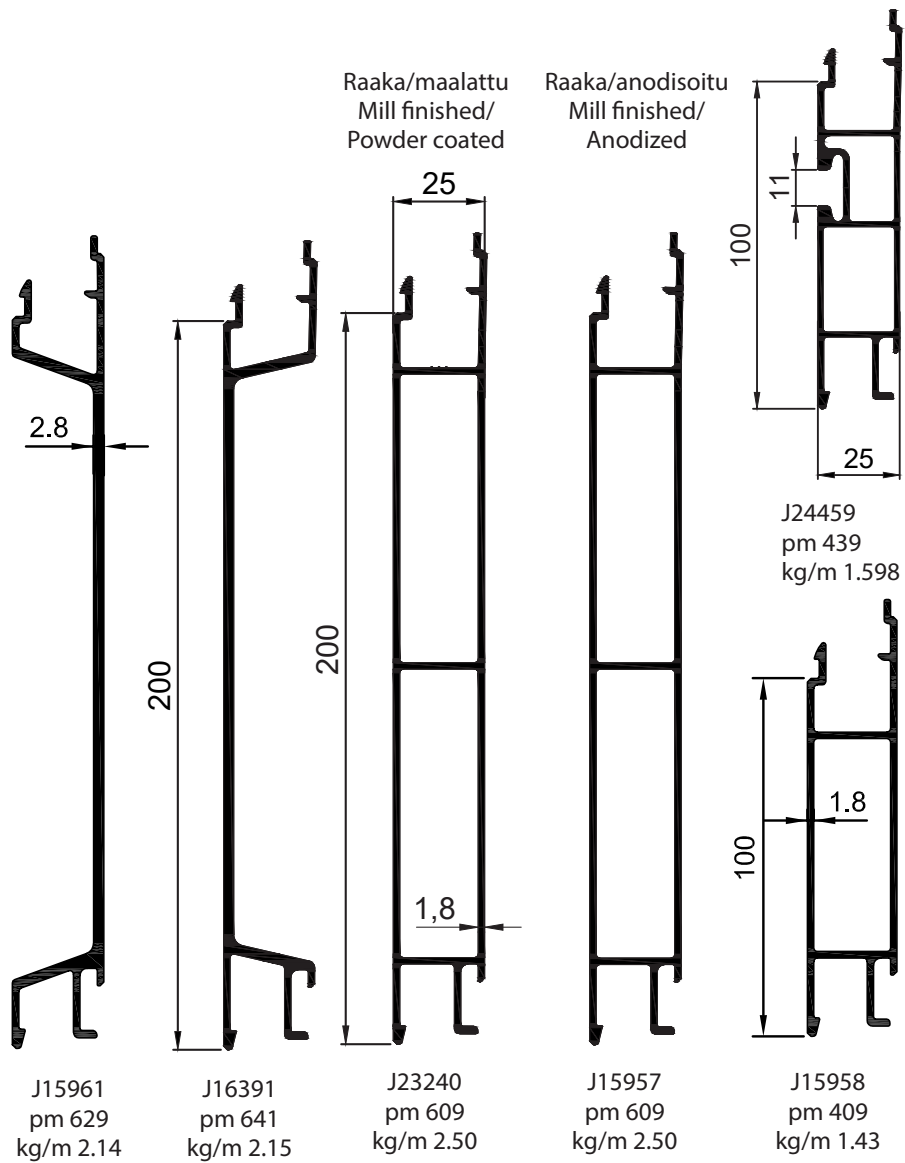


Laitaprofiilit 25 mm


Yläprofiilit

25 mm dropside profiles


Upper section

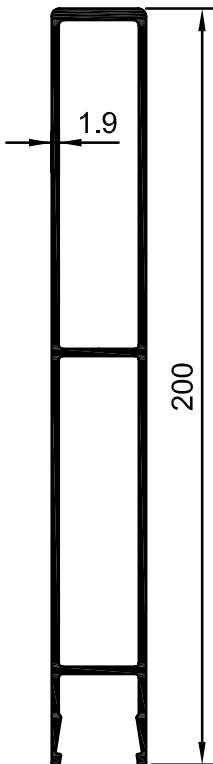


J07136
pm 497
kg/m 2.44

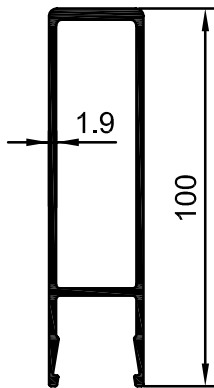

J07575
pm 297
kg/m 1.30

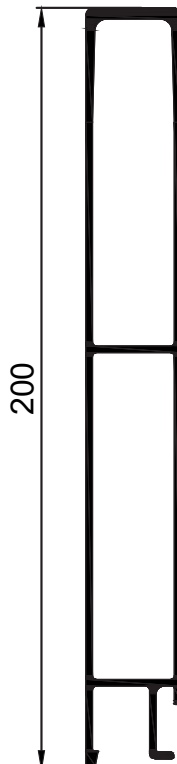

J15959
pm 502
kg/m 2.33

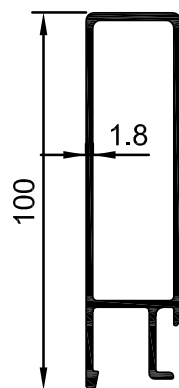


J16146
pm 301
kg/m 1.23

Laitaprofiilit 25 mm

Alaprofiilit

25 mm dropside profiles

Lower section

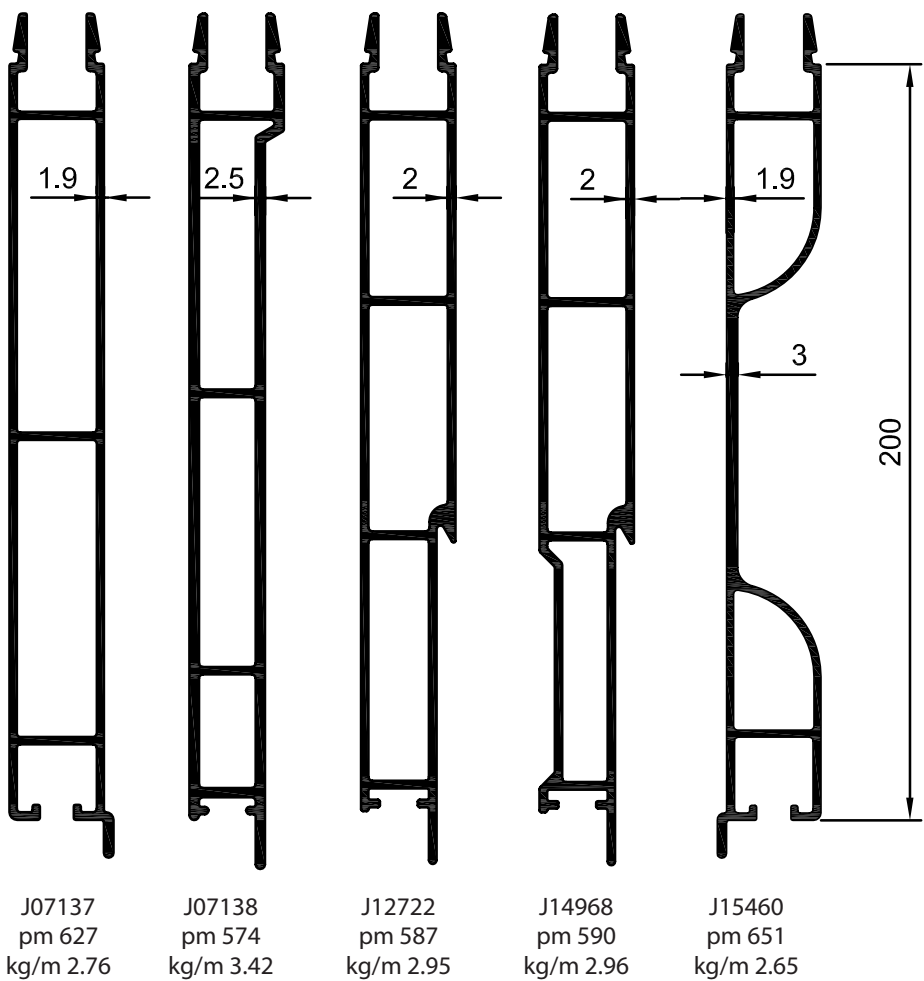


Laitaprofiilit 25 mm

Väliprofiilit


25 mm dropside profiles

Middle section

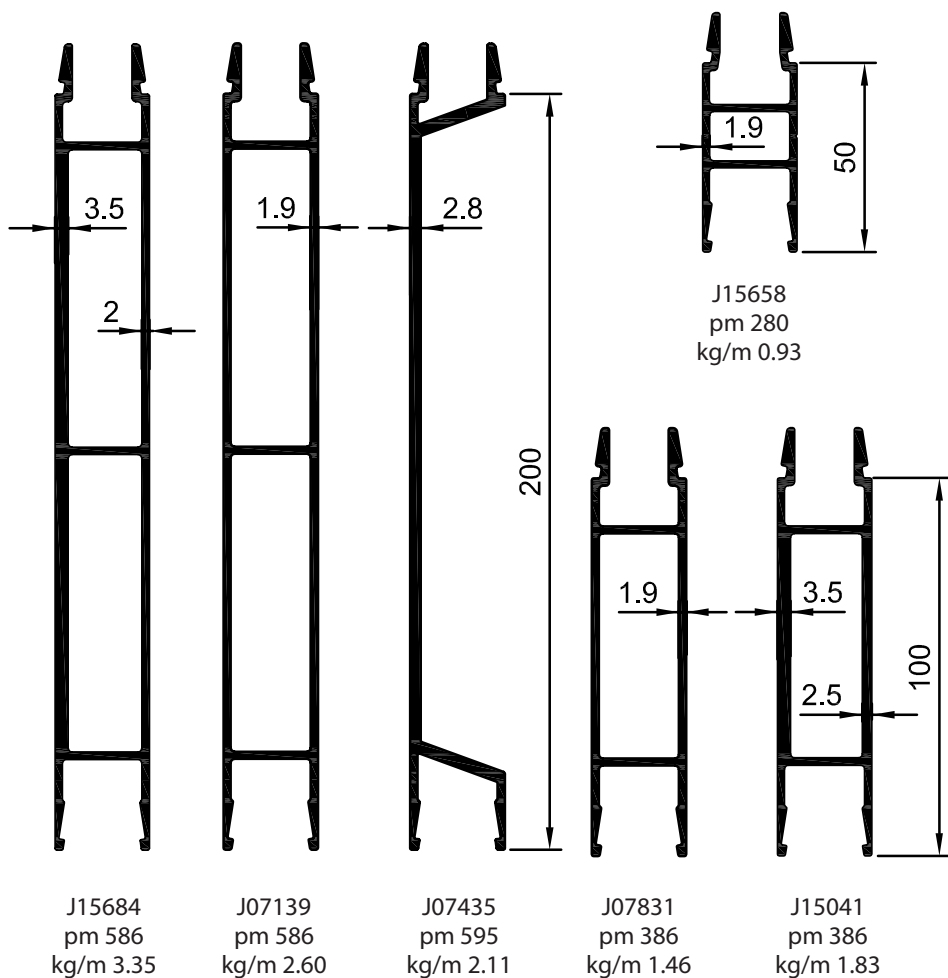


Kapelliprofiilit 25 mm


25 mm Board console profiles

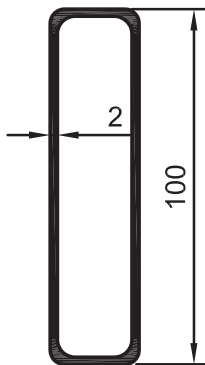

J07289
pm 243
kg/m 1.33




J15386
pm 345
kg/m 1.95

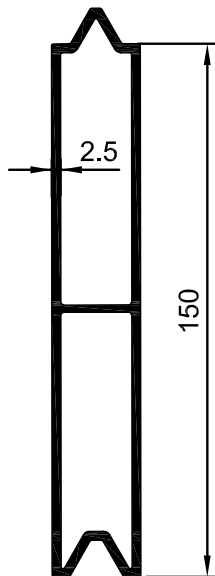


J15387
pm 372
kg/m 2.56

U-Profiilit


U-profiles



J16070
pm 231
kg/m 1.21



J22164
pm 283
kg/m 1.07




J22163
pm 249
kg/m 0.95

Laitaprofiilit 25 mm


Päätyprofiilit

25 mm dropside profiles


End section




J07250
pm 210
kg/m 0.77




J07251
pm 244
kg/m 0.89




J08879
pm 239
kg/m 0.85



J07576
pm 284
kg/m 0.95



J15341
pm 250
kg/m 0.91




J16492
pm 330
kg/m 1.23

Laitaprofiilit 30 mm


Päätyprofiilit

30 mm dropside profiles


End section




J11740
pm 242
kg/m 0.88



J16311
pm 226
kg/m 0.72



J15268
pm 221
kg/m 0.82




J15255
pm 206
kg/m 0.77

Laitaprofiilit 30 mm

Ylä/väli/alaprofiilit


30 mm dropside profiles

Upper/middle/lower section

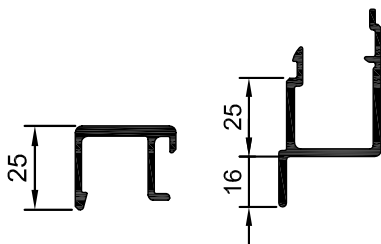


J16562
pm 162
kg/m 0.51


J16563
pm 262
kg/m 0.84

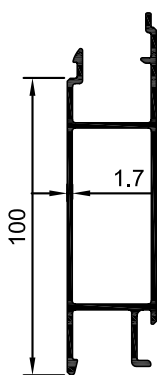


J16870
pm 420
kg/m 1.41

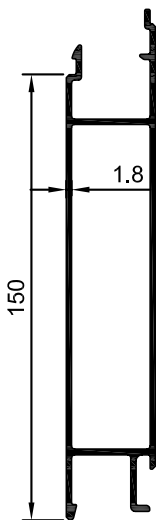


J16871
pm 519
kg/m 1.96

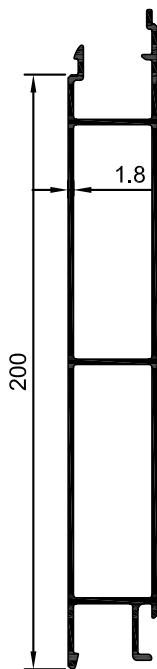

J16872
pm 619
kg/m 2.58

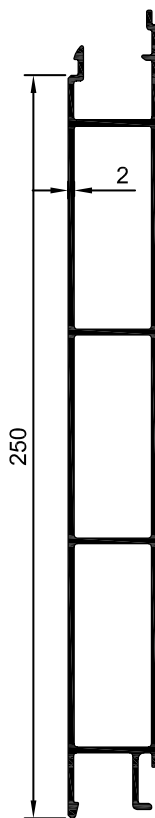

J16561
pm 719
kg/m 3.46

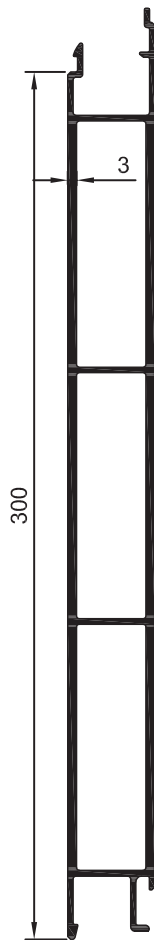


J19098
pm 819
kg/m 5.37

Laitaprofiilit 30 mm


Ylä/väli/alaprofiilit

30 mm dropside profiles


Upper/middle/lower section

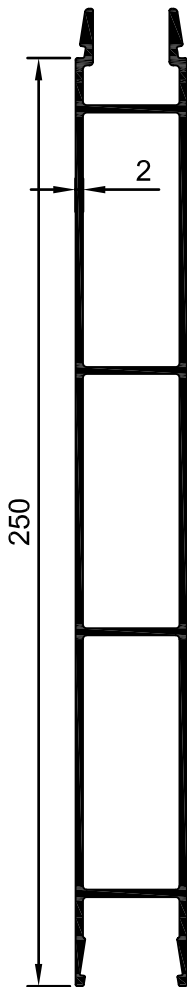


J15148
pm 696
kg/m 3.48

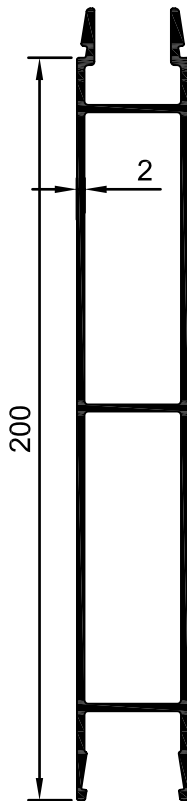


J15347
pm 596
kg/m 2.80



J15253
pm 172
kg/m 0.61



J15254
pm 228
kg/m 0.78




J15348
pm 253
kg/m 0.85


Laitasaranat

Dropside hinges

JK14967

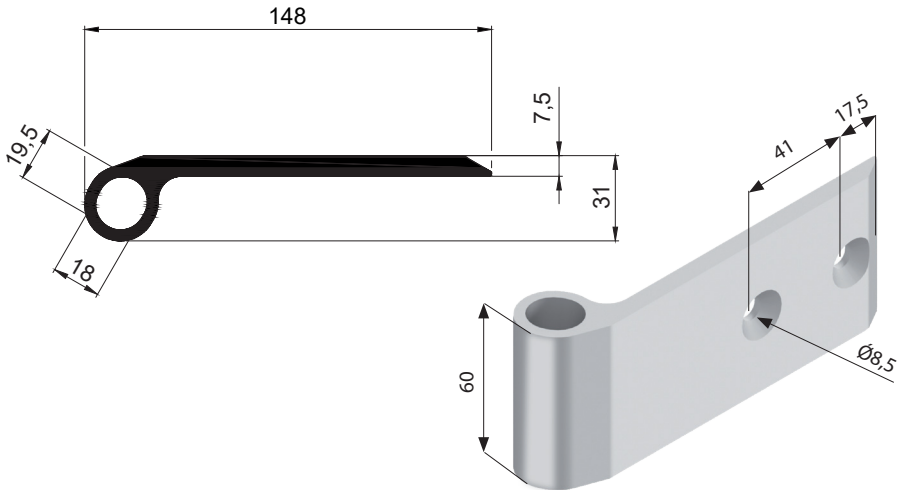


JK7930

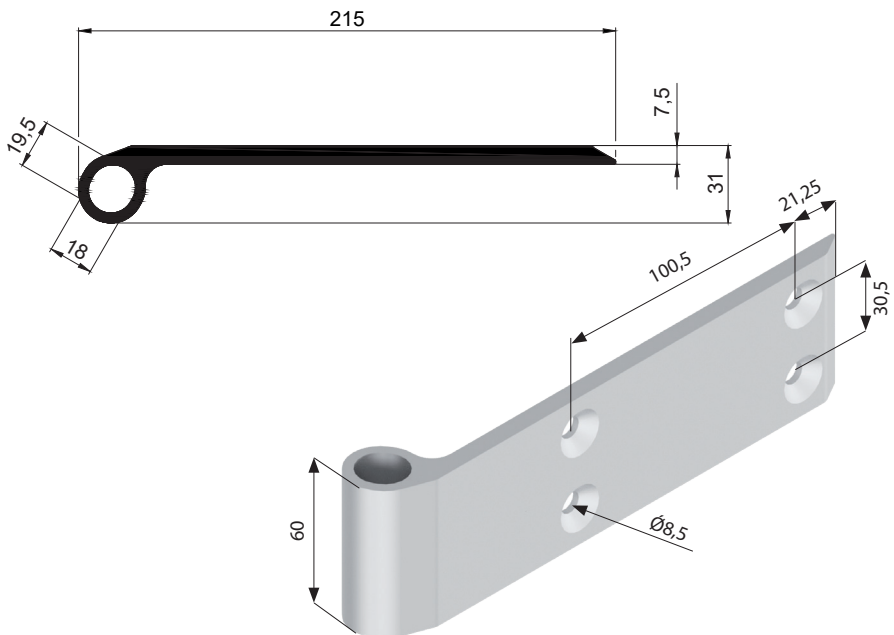

Sienimutterit

Rivet nuts


JKSIENI 13





JKSIENI 22.3



JKSIENI 25

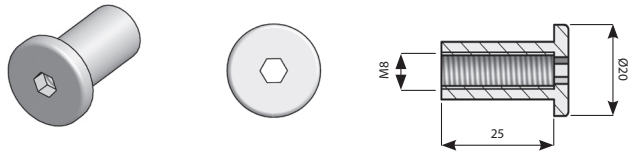

JKSIENI 27.2

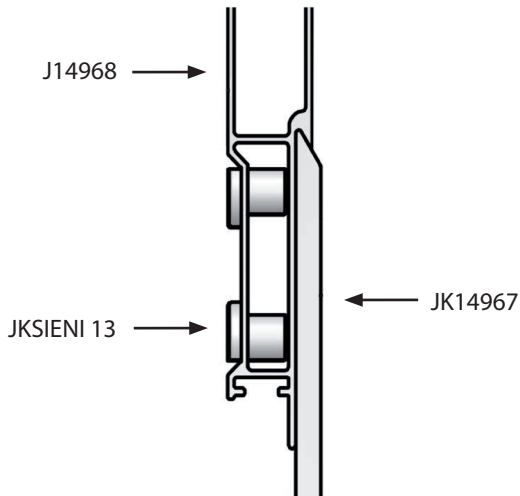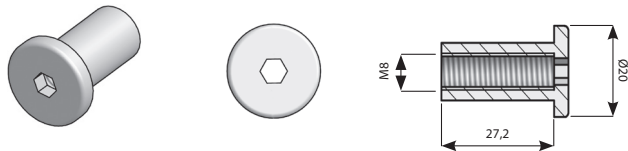







Koriprofiilit

Body profiles

Korikulmat

Body profiles

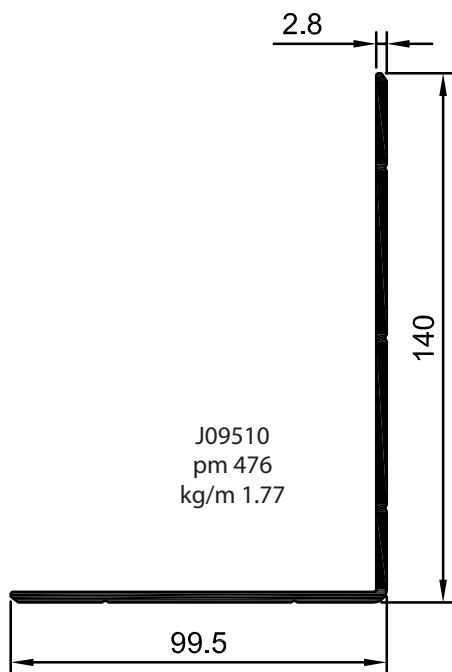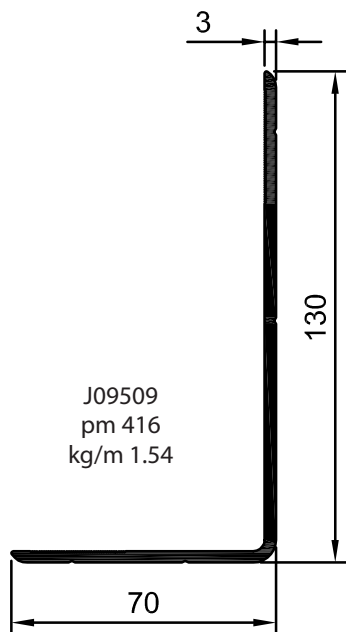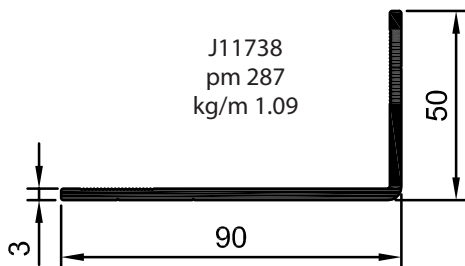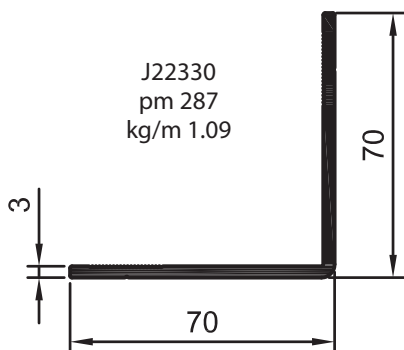


Korikulmat


Body profiles




J13801
pm 318
kg/m 1.12

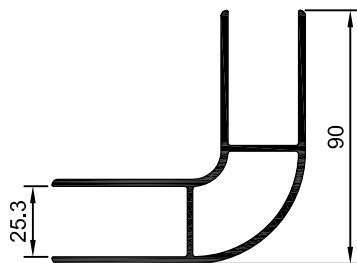

J07479
pm 524
kg/m 2.14




J09508
pm 151
kg/m 0.60




J22329
pm 208
kg/m 0.77

Korikulmat


Body profiles

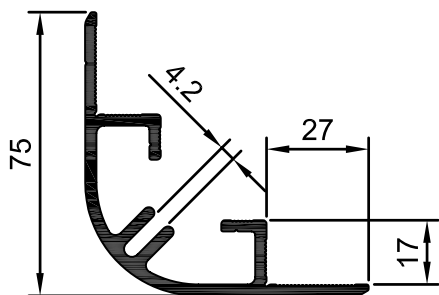

J15956
pm 436
kg/m 1.67




J15954
pm 199
kg/m 0.60

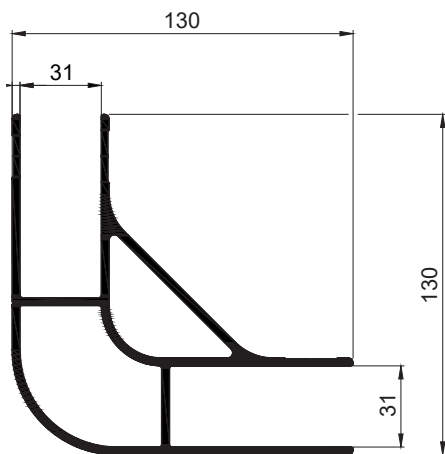

J24131
pm 745
kg/m 4.47

Combi-kisko


Combi-rail




J15076
pm 745
kg/m 6.39

Tippalistat


Drop trim profiles



J12970
pm 292
kg/m 1.08




J15858
pm 274
kg/m 0.99




J11741
pm 269
kg/m 1.16

Sermiprofilit

Headboard panel profiles

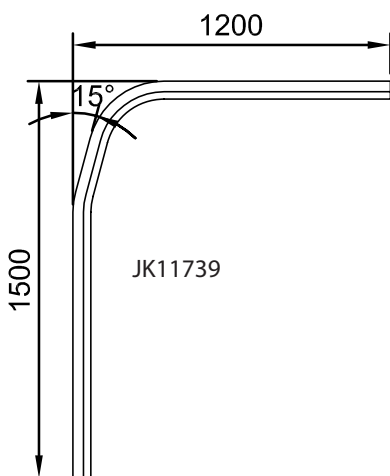


JK11739

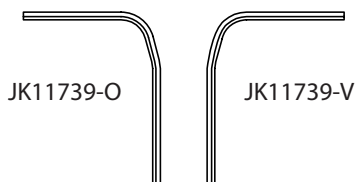

JK11739-O

JK11739-V

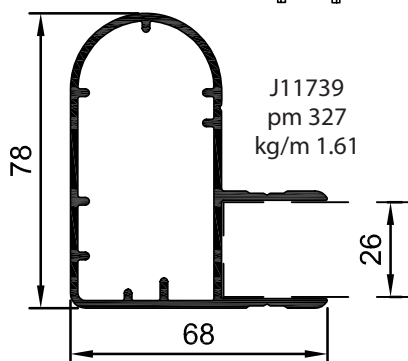


J11739
pm 327
kg/m 1.61


Sidontakiskoprofiilit

Lashing rails


Koneistettuna
J24459
pm 439
kg/m 1.598

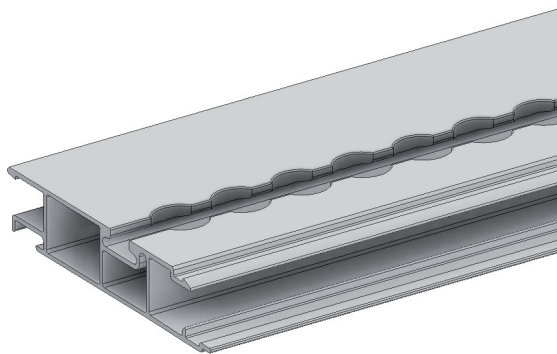


J21929
pm 193
kg/m 0.82

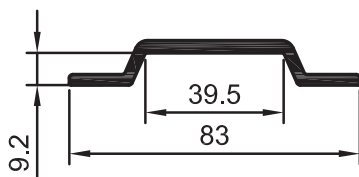

J21020
pm 223
kg/m 0.964

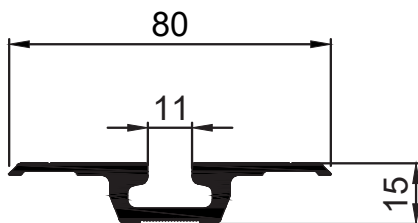


J21015
pm 476
kg/m 1.971

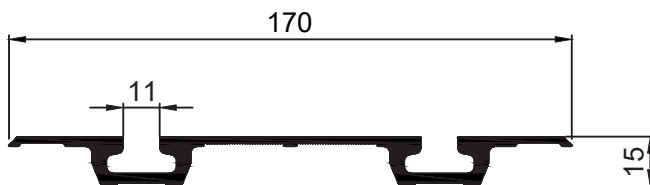

Potkupellit


Kickplates

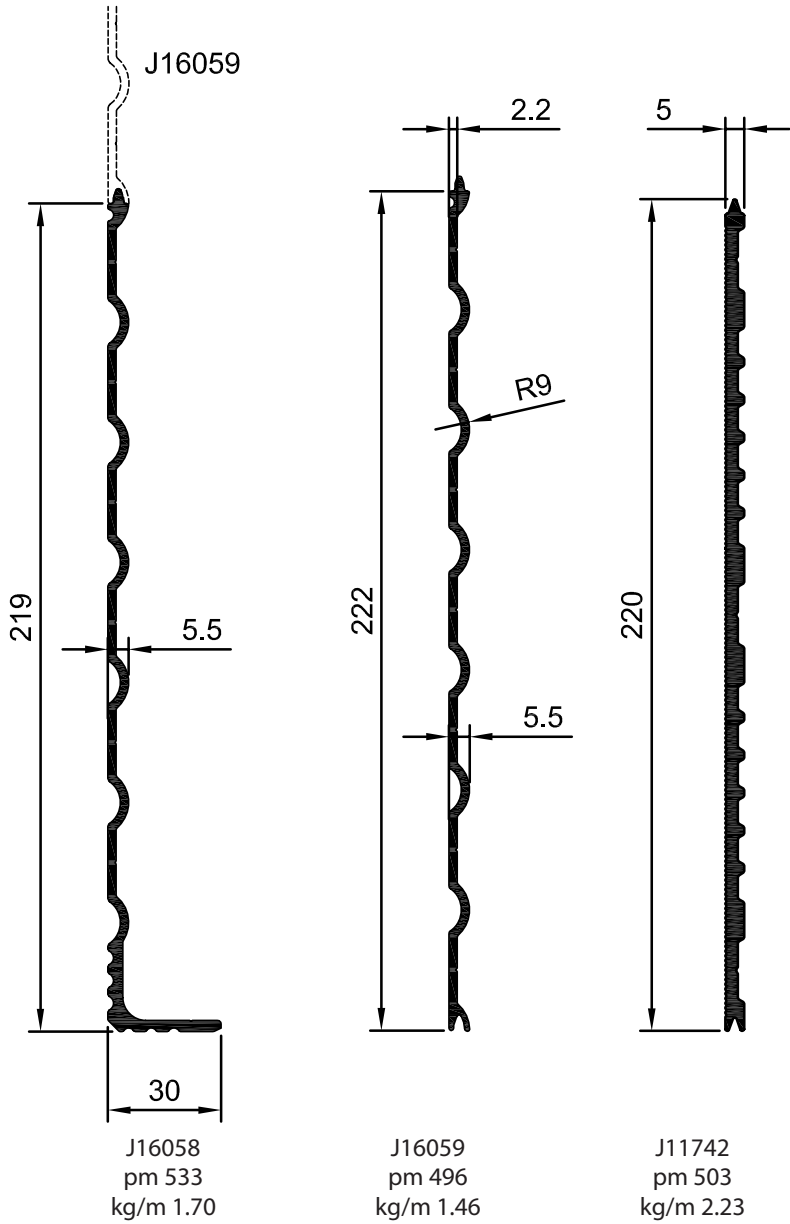


Autokorilistat

Car body mouldings


J00028
pm 36
kg/m 0.12




J00027
pm 44
kg/m 0.15

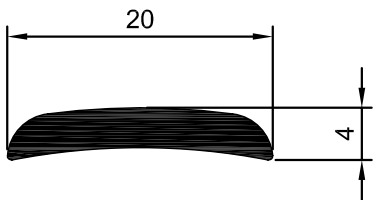


P04048
pm 49
kg/m 0.22

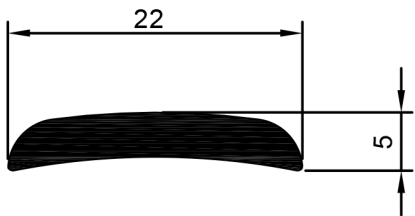

J00029
pm 55
kg/m 0.23

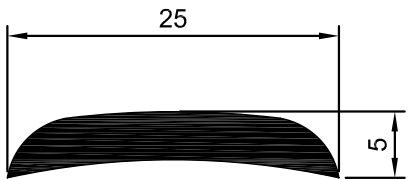

J00131
pm 66
kg/m 0.351




J23750
pm 82
kg/m 0.313




Lavarakennepiilit

Platform structure profiles

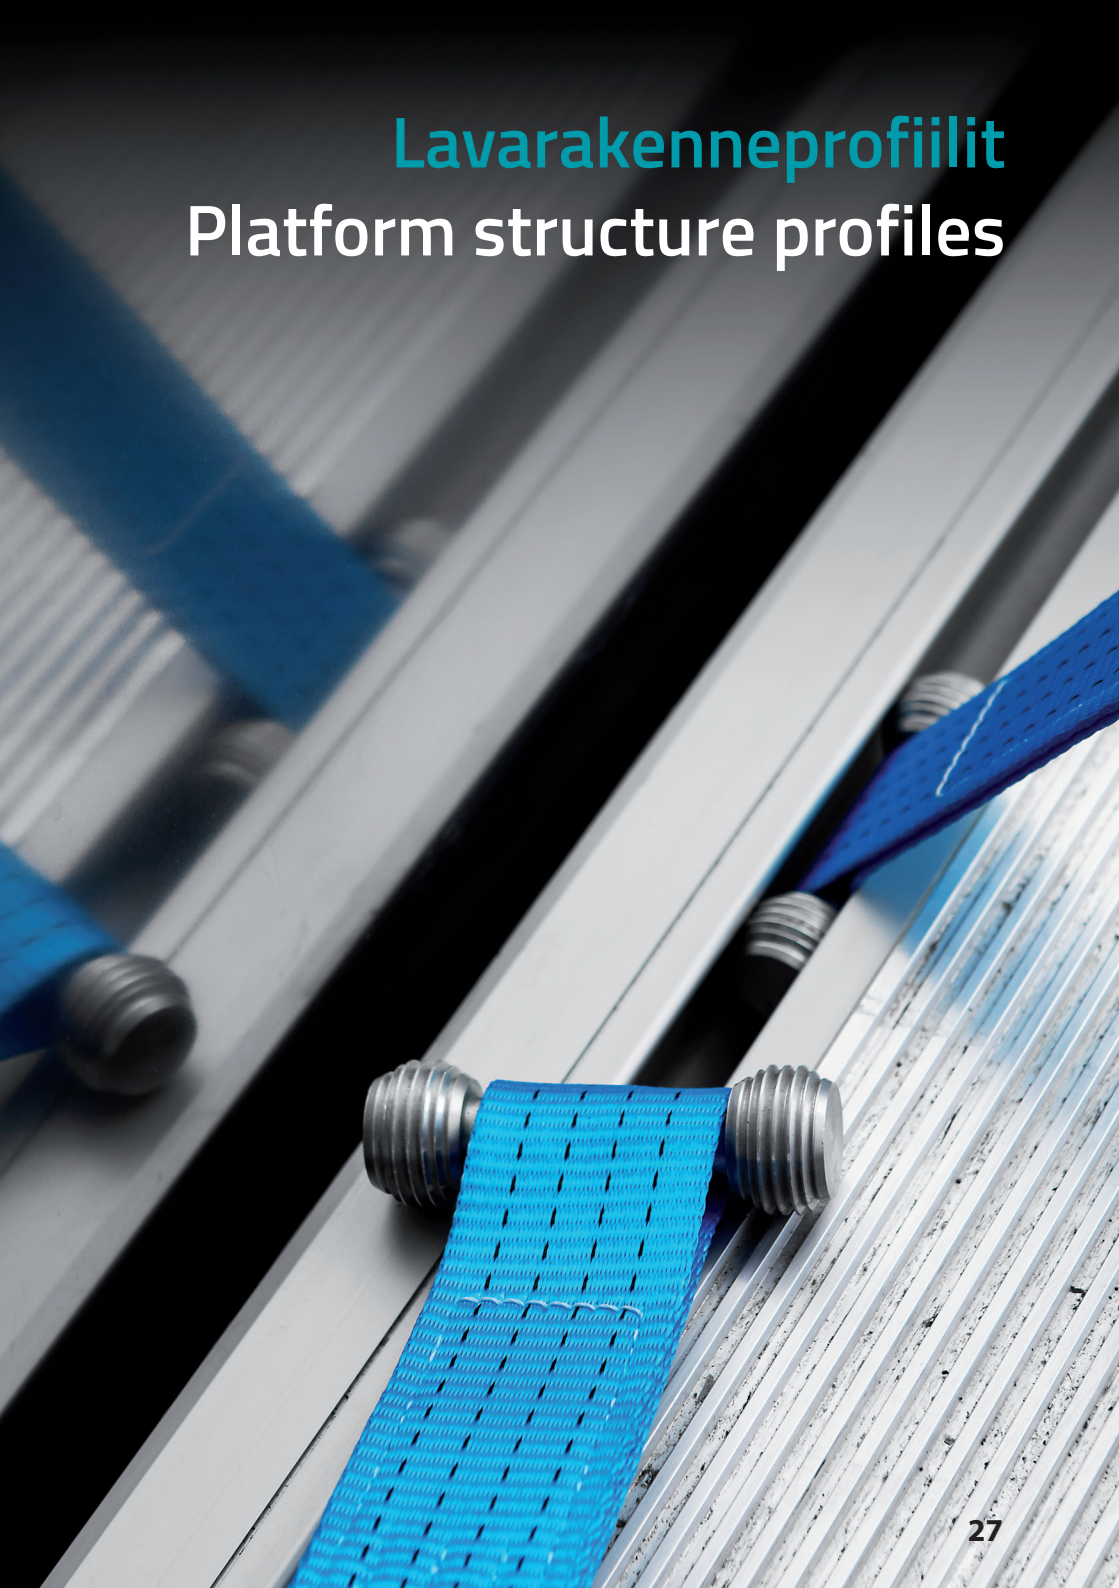

Lavarakenteet


Platform structure profiles

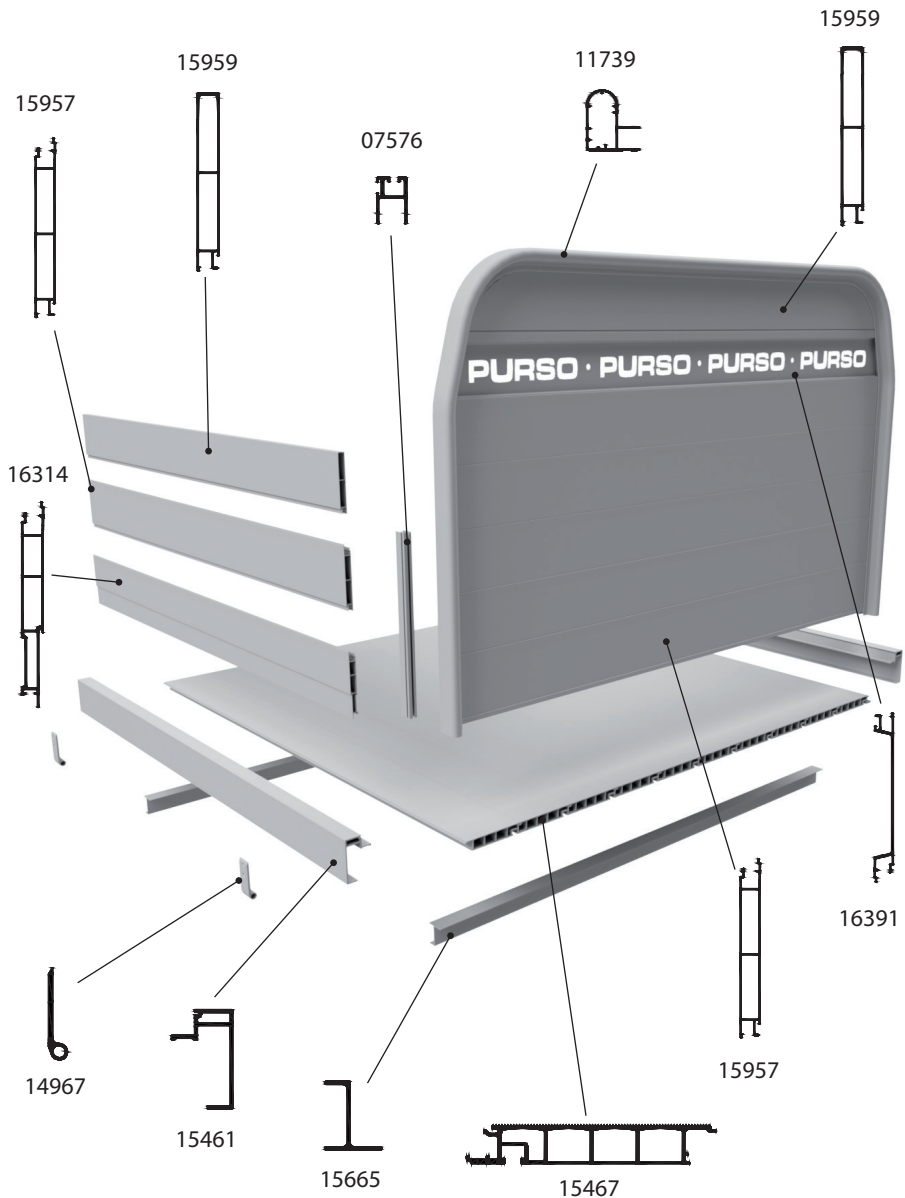


Lattiarakenteet

Floor structure profiles


J23561
pm 775
kg/m 6.73

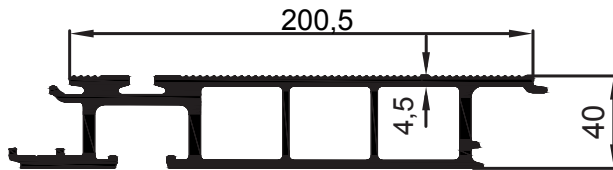


J15467
pm 772
kg/m 5.83

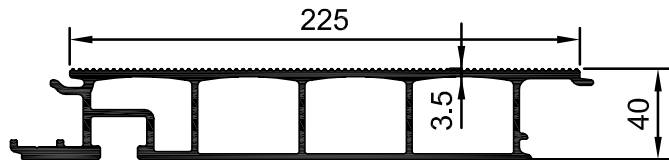

J15690
pm 778
kg/m 5.79

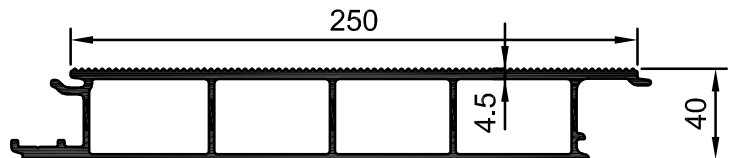


J13551
pm 973
kg/m 4.42




Lattiarakenteet

Floor structure profiles


J02713
pm 621
kg/m 2.08

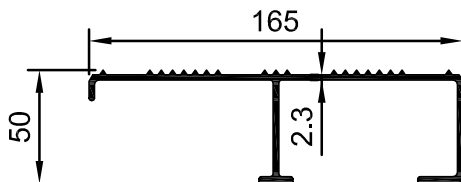


J02714
pm 752
kg/m 2.56

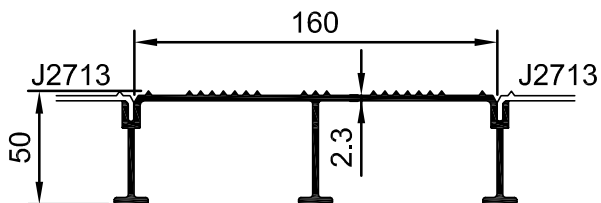

J13563
pm 1032
kg/m 3.43




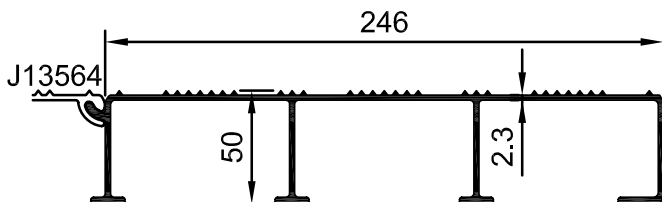


J13564
pm 929
kg/m 3.11

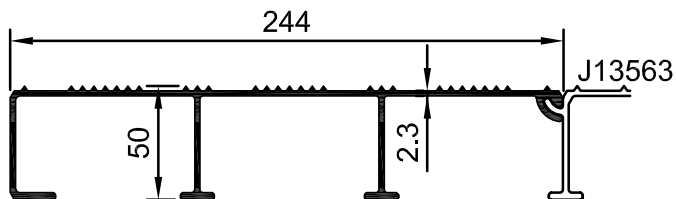


Lattiarakenteet

Floor structure profiles

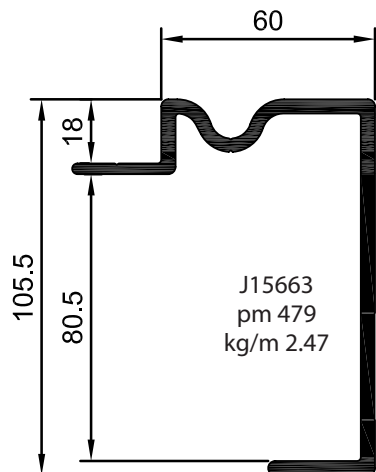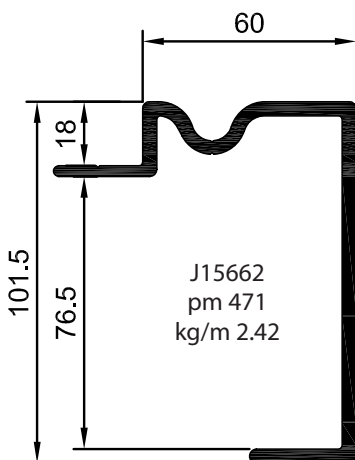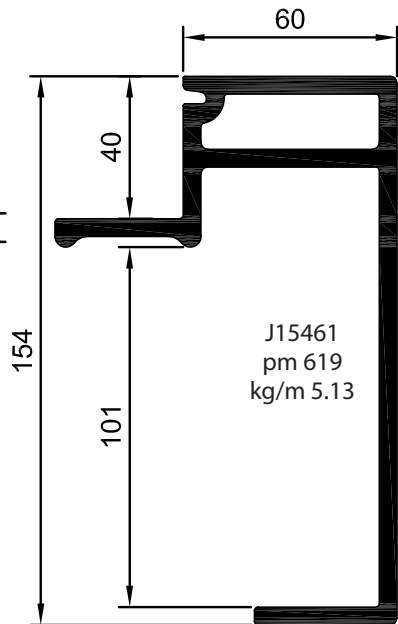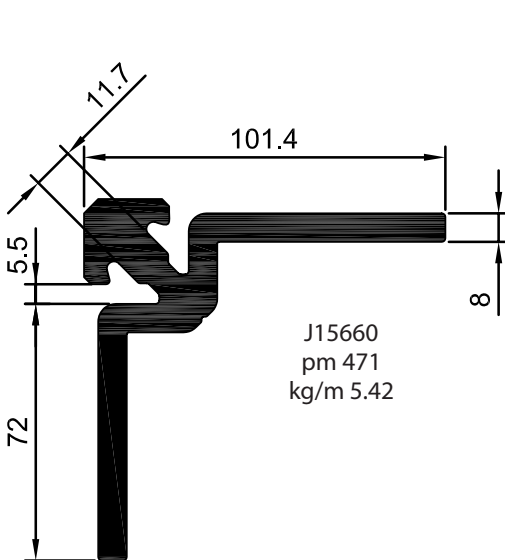


Lattiarakenteet


Floor structure profiles




JK15512




JK15513-1



JK15513-2




J15513

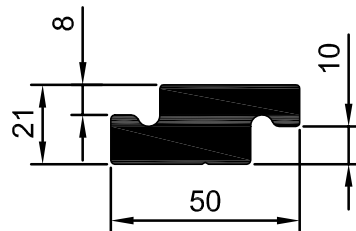

J15512

Apurungot

Subframes

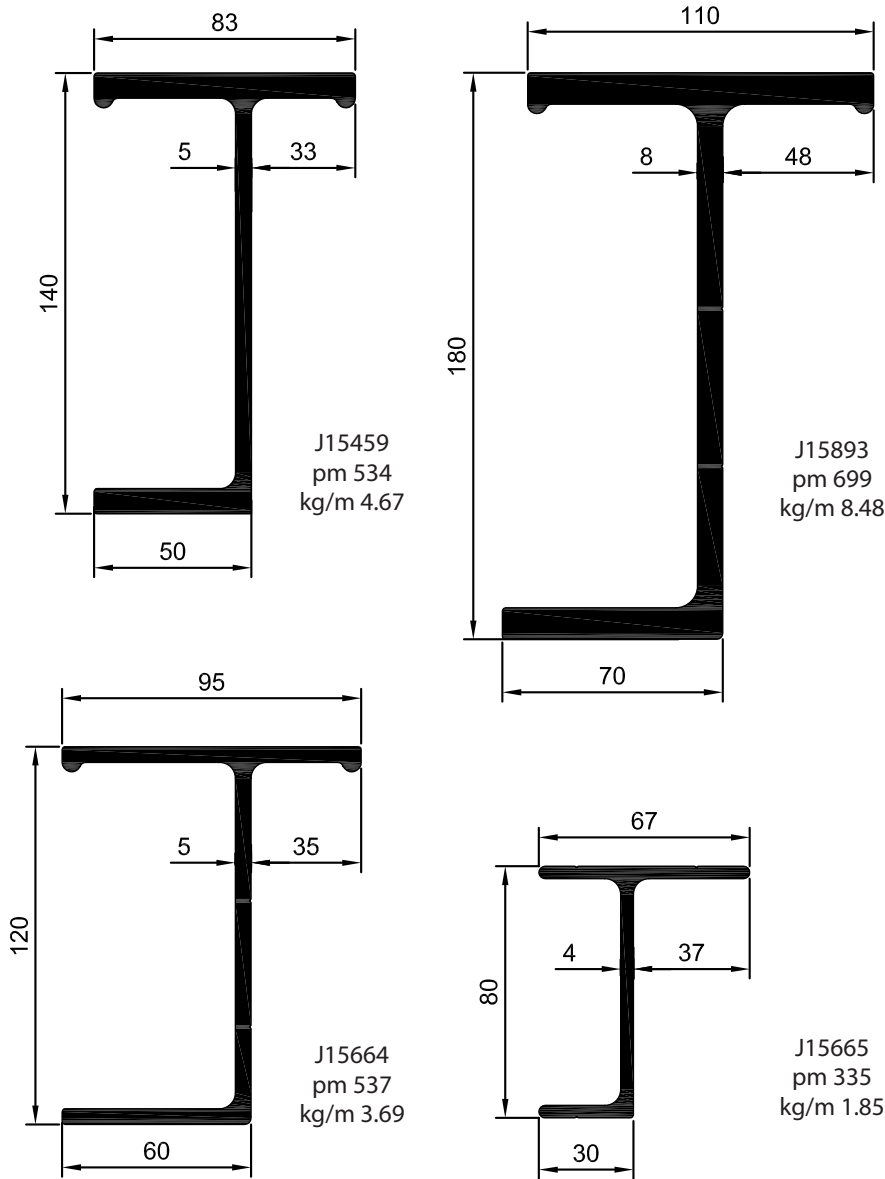




Alleajosuojat Underrun protection profiles


Alleajosuojat

Underrun protection profiles

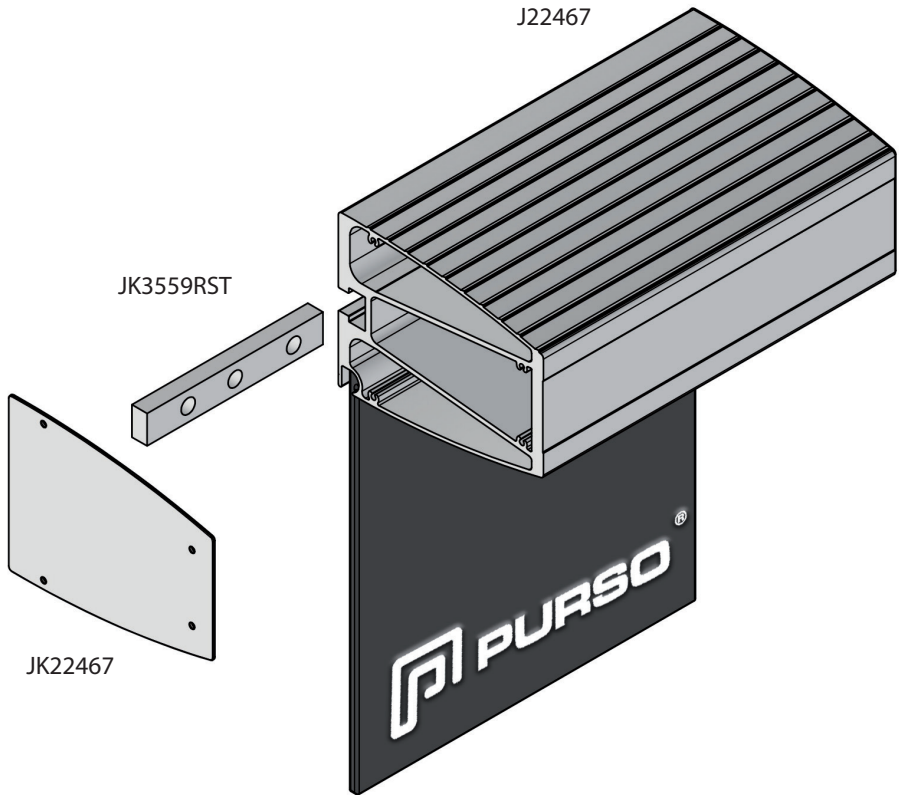

Underrun protection profiles

Underrun bar is intended to be used as a part of an RUPD configuration according to UNECE R58/03

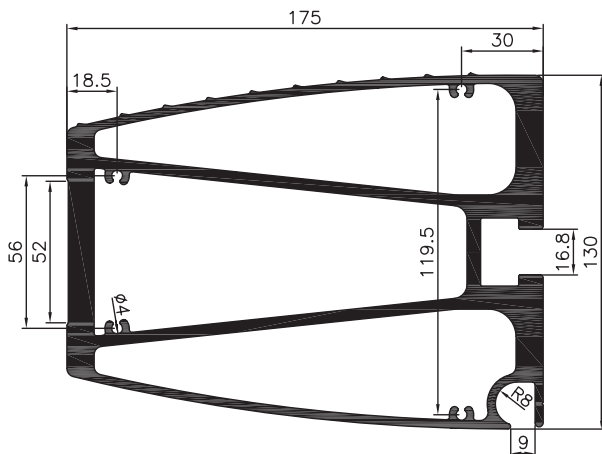


J22467SET

2400 mm


+ 2 pcs JK22467

+ 2 pcs JK3559RST

J22467
pm 673
kg/m 12.59




JK3559RST

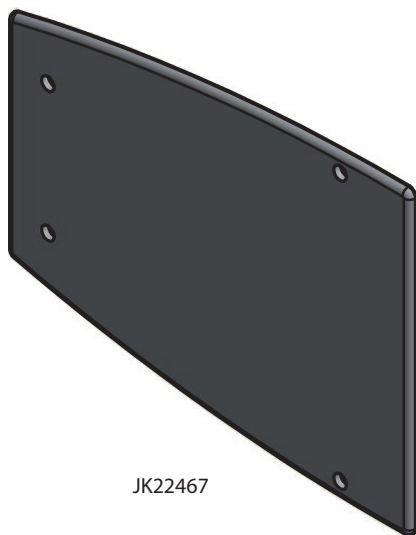

JK22467

Alleajosuojat


Underrun protection profiles

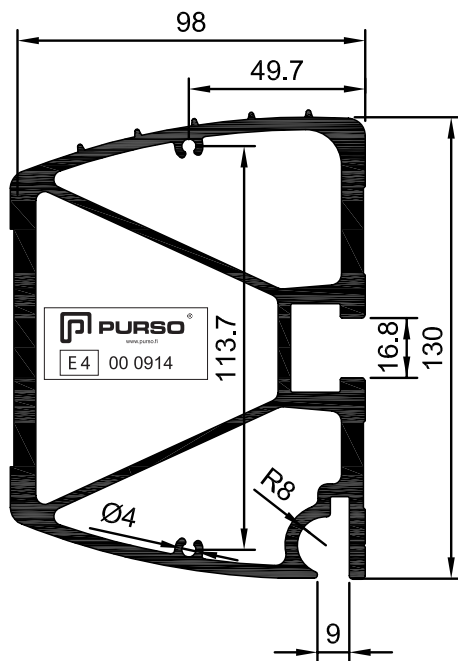


J14966SET

2400 mm
+ 2 pcs JK14966
+ 2 pcs JK3559RST


J14966
pm 529
kg/m 7.46

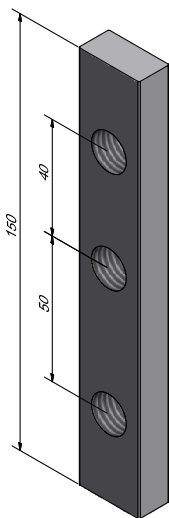

JK3559RST

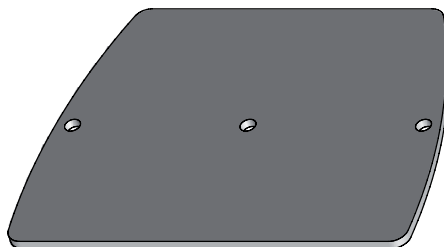


JK14966A
JK8880A




J14955
pm 186
kg/m 0.64

Alleajosuojat

Underrun protection profiles




JK7041

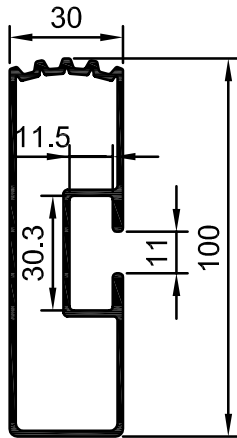


J07041
pm 328
kg/m 1.41




JK15143

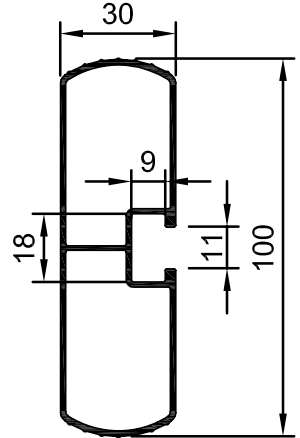

J15143
pm 282
kg/m 1.12



JK7478

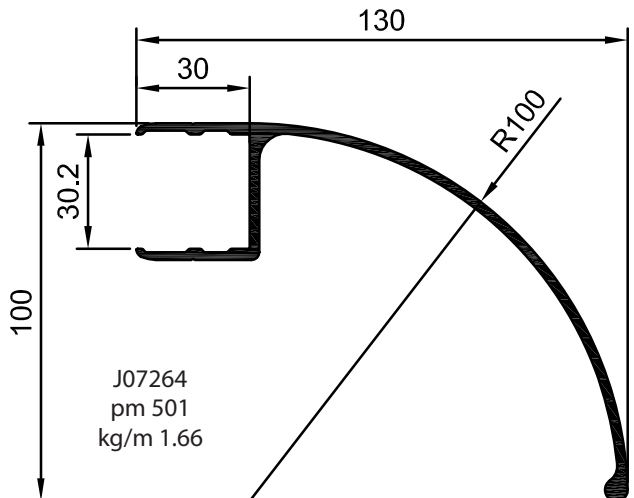


J07264
pm 501
kg/m 1.66



Valopalkki Light beam profile



Valopalkki

Light beam profile

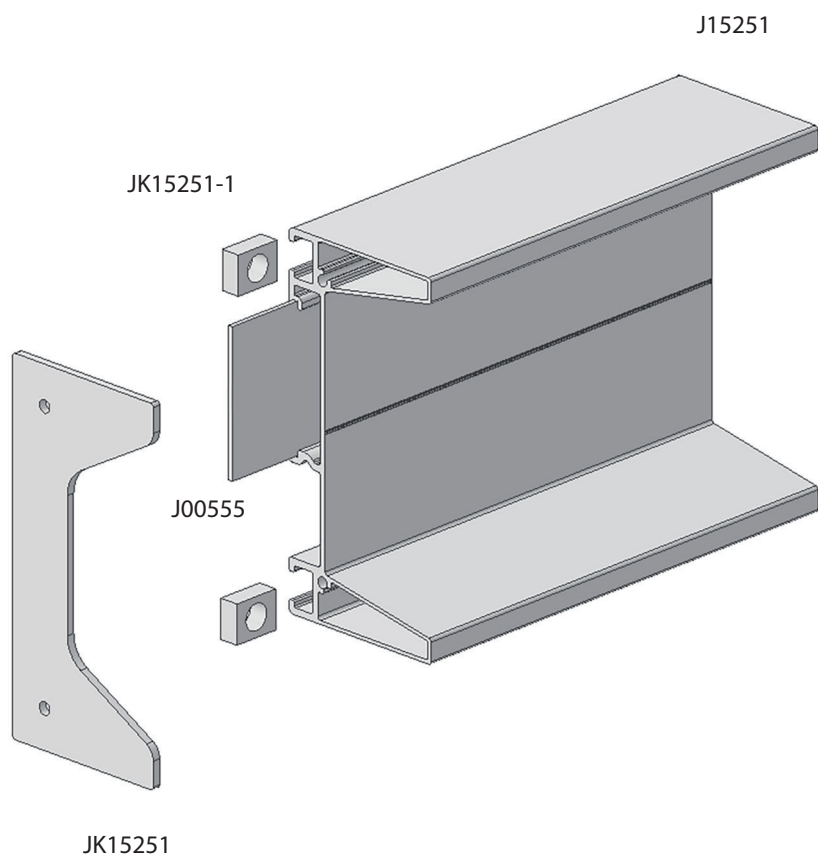


Valopalkki

Light beam profile

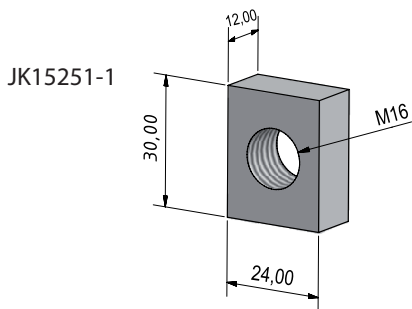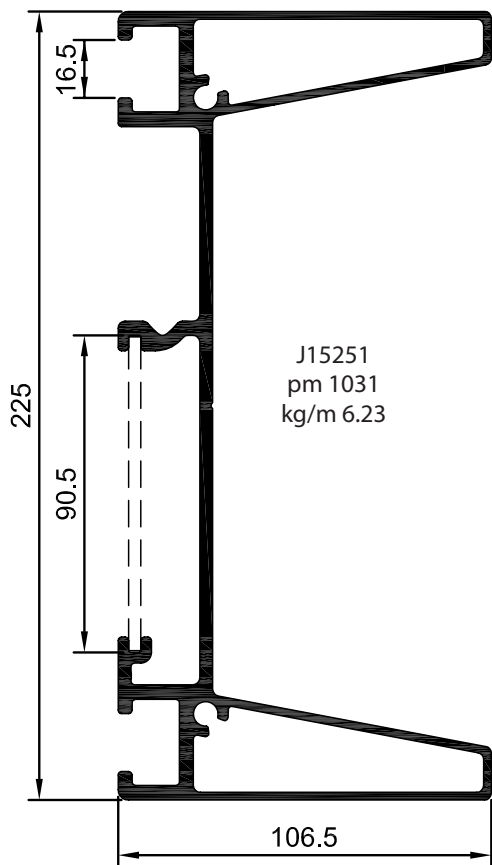


J15251SET

2450 mm
+ 2 pcs J00555 (1224mm)
+ 2 pcs JK15251
+ 4 pcs JK15251-1

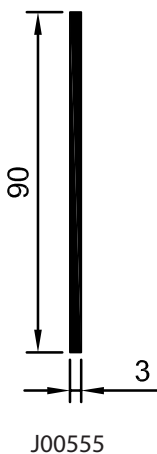

JK15251



Actec automaatioprofiilit

Automation profiles


J07394

Dimensions: 30x30

Light structures

Material: EN-AW 6063

m = 1.034 kg /m




J11175

Dimensions: 40x40

Light structures

Material: EN-AW 6063

m = 1.914 kg /m

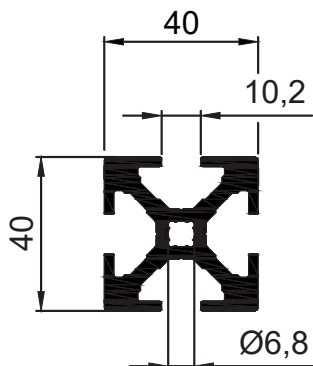


J10659

Dimensions: 50x50

Light Structures

Material: EN-AW 6063

m = 1.747 kg /m

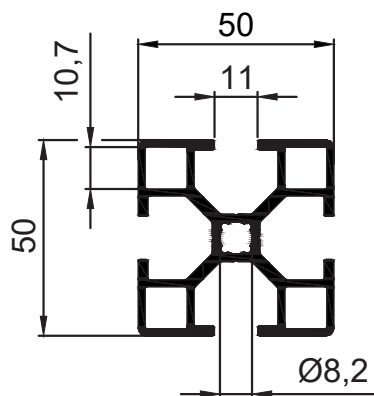


J06770

Dimensions: 50x50

Heavy structures

Material: EN-AW 6063

m = 2.711 kg /m

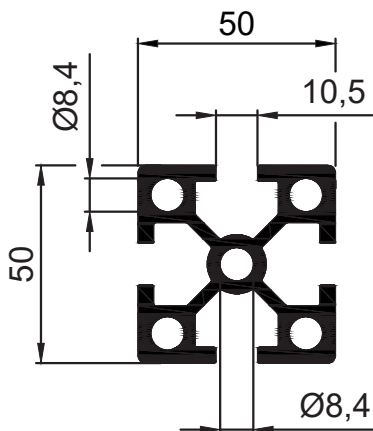

Actec automaatioprofiilit


Automation profiles

J12216

Dimensions: 40x80

Heavy structures

Material: EN-AW 6063
m = 3,445 kg / m

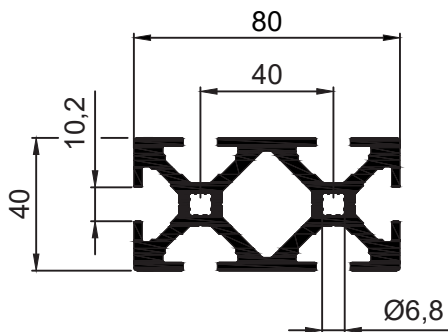


J06771

Dimensions: 50x100

Heavy structures

Material: EN-AW 6063
m = 4,390 kg / m

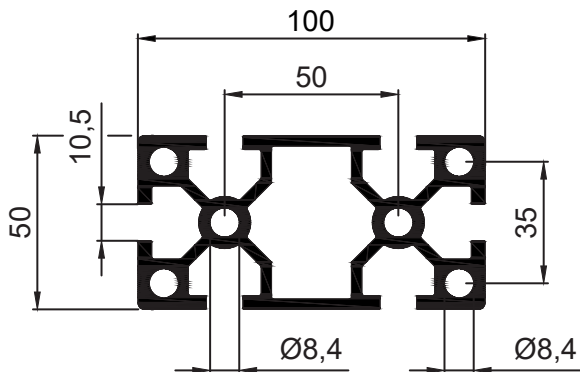


J11594

Dimensions: 80x80

Heavy structures


Material: EN-AW 6063
m = 5,303 kg / m

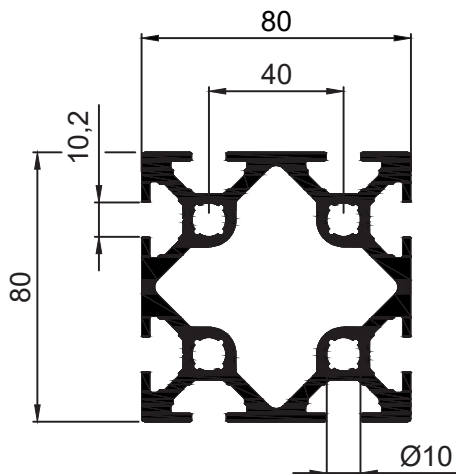


Actec automaatioprofiilit

Automation profiles


JLACKULMA/30




JLACKULMA/40





JLACKULMA/50



JLACKULMA/80



JLACKULMA/100



Purson yleiset toimitusehdot Suomessa 2023 (PGT2023)

Toimitusehto

FCA Siuro, Incoterms 2020, ellei toisin ole sovittu.

Maksuehto

Maksuehto sopimuksen mukaan.

Laskutus

Laskutus sähköisesti verkkolaskuina. Paperilaskuista veloitetaan erillinen käsittelymaksu.

Pakkaus

Vakiopakkaus (muovikääre ja trukkipuut) sisältyy myyntihintaan. Poikkeavasta pakkaustavasta on sovittava erikseen.

Piirustukset

Valmistamamme piirustukset ja mallit ovat omaisuuttamme, eikä niitä saa ilman lupaamme jäljentää eikä luovuttaa tai esitellä kolmannelle osapuolelle.

Huomautukset

Toimituksia koskevat huomautukset on tehtävä Pursole 14 päivän ja kuljetusvaurioissa 7 päivän kuluessa tavarán vastaanotosta. Mahdolliset vauriot on vastaanoton yhteydessä merkittävä rahtikirjaan ja ne on asianmukaisesti dokumentoitava.

Toimitusmäärä

Minimipursotusmäärä seoksilla 6063 ja 6060 on 250 kg/profilili ja seoksilla 6082 ja 6005 500 kg/profilili. Kilo- tai metrimääräisenä ilmoitettua tilausta pidetään likiarvona, ja toimituserän määrä saa poiketa tilasta plus-miinus 10 prosenttia, mutta kuitenkin vähintään plus-miinus 50 kg (alle 500 kg tilauserät). Komponentteja tilattaessa sallitaan tilatun määrän ylitys 10 %. Tarkasta kappalemäärästä on sovittava erikseen.

Toleranssit

Yleensä sovelletaan SFS-EN 755-9:n mukaisia toleransseja. Erikseen sovittaessa on mahdollista soveltaa myös muita toleransseja.

Ainestodistukset

Ainestodistukset lisäveloituksesta. Tarvittavista aine-
todistuksista on sovittava viimeistään tilauksen yhteydessä.

Toimituspituudet

Normaali toimituspituus on 3–8 m. Katkaisutarkkuus SFS-EN 755-9:n mukaan. HUOM! Profiliin suurin katkaisupituus on 16 metriä.

Anodisoidut ja maalatut profiilit

Anodisoitujen profiilien päihin jää aina kontaktijäljet. Mikäli profiilin ripustuksessa tarvitaan keskutukea, profiilin keskelle muodostuu mahdollinen kontaktijälki. Mikäli profiili pintakäsitetään asiakkaan toimesta, on siitä mainittava tilausvaiheessa.

Maalatus, anodisoidun ja raa'an profiilin säilytys

Asennusta tai loppukäyttöä odottava, kuljetuspakkauksessa oleva profiili säilytetään sateelta ja auringolta sekä ulkoisilta iskemiltä tms. vahingoittumiselta suojassa kuivassa tilassa. Profiilin pakkaus ei saa olla kostea.

Maalatus, anodisoidun ja raa'an pinnan huolto

Pinta tarkastetaan ja puhdistetaan vähintään kerran 12 kuuksaudessa: pesu neutraalilla (pH n. 5-8) synteettisellä pesuaineliuksella sekä huuhtelu haalealla puhtaalla vedellä. Puhdistuksessa ei saa käyttää myöskään voimakkaita emäksisiä tai happamia pesuaineita.

Profiilityökälyt

Asiakas vastaa mallin tai piirustuksen mukaan tilattujen profiilien mahdollisesta patentin loukkaamisesta tai mallioikeuksien rikkomisesta. Profiilityökälyt ovat myyjän omaisuutta ja ne hävitetään kolmen (3) vuoden kuluttua viimeisestä valmistuksesta lukien. Asiakkaan kirjallisesta pyynnöstä ja kustannuksella, varastoidaan työkaluja pitemmän ajan. Asiakas ei ole oikeutettu saamaan mitään korvausta hävitetyistä työkaluista. Profiilityökälyjä käytetään vain asiakkaan tilauksesta. Muulla tavoin ei asiakkaalla ole oikeutta määrätä työkaluista. Asiakkaan kaikki oikeudet profiilityökälyihin lakkaavat, mikäli asiakas asetetaan konkurssiin tai toiminta päättyy. Uuden tuotteen/työkälyn ensimmäistä toimitusta koskien emme voi antaa sitovaa toimitusaikaa, koska uusi profiilityökäly tarvitsee aina toiminnan varmistamiseksi yhden tai useamman testiajan ja mahdollisen korjauksen.

Omistuksenpidätys

Purssolla on omistusoikeus tuotteisiin siihen asti, kunnes asiakas on maksanut kauppahinnan kokonaisuudessaan. Asiakkaan tulee varastoida tuotteet siten, että ne ovat erotettavissa asiakkaan omaisuudesta.

Ylivoimainen este

Ylivoimaiseksi esteeksi katsotaan yleisissä sopimusehdoissa NL 17 mainittujen syiden lisäksi koneiden tai työkalun sekä mahdollisten varatyökälyjen yhtäaikainen rikkoutuminen tavalla, joka tekee mahdottomaksi sopimukseen perustuvien velvoitteiden täyttämisen ajallaan.

Tilaukset

Profiili- ja komponenttitilaukset tulee lähettää sähköpostilla osoitteeseen: tilaukset@purso.fi. Rakennusjärjestelmätuotteet osoitteeseen: psarjatilaukset@purso.fi. Tilaukselta tulee löytyä profiilin tunnus, tilattu määrä, toivottu toimitusaika, toimitus- ja laskutusosoitteet, Y-tunnus sekä asiakkaan tilausnumero ja kontaktihenkilö.

Tilauksen muuttaminen tai peruminen

Vahvistettu tilaus on aina sitova. Mikäli sovitaan tilauksen muutoksesta tai perumisesta, Purso varaa oikeuden laskuttaa min. 10 % tilauksen arvosta. Muutokset on aina tehtävä kirjallisesti ja ne käsitellään tapauskohtaisesti.

Muut ehdot

Muilta osin noudatamme toimituksissa yleisiä sopimusehtoja NL 17.

Purso general terms 2023 (PGT-2023)

Alloys

If not otherwise stated the alloy used is EN AW-6063 T5, according to EN 573-3:1994. Mechanical properties are according to EN 755-2:1997. If anodizing quality is required, this shall be separately and clearly stated in the order.

Tolerances

Tolerances of the profiles are according to EN 755-9. Other tolerances can be used if separately so agreed. Normal radius for sharp corners and edges is 0,5 mm.

Orders

Please send profile and component orders by e-mail to: orders@purso.fi

Building system orders: psarjatilaukset@purso.fi

The order must contain profile ID, ordered quantity, request of delivery time, delivery and invoicing address, VAT number, customer order number and contact person.

Order changes and cancellation

Confirmed order is always binding! In case of agreed changes / cancellation between parties, Purso reserves right to invoice 10% of the original order value. Changes to be always made in writing and apply on case-by-case basis.

Delivery lengths

Standard delivery length of the profiles is between 4,0–8,0 m, for building systems 6,6 m, tolerance according to EN 755. Other lengths can be delivered according to separate agreement. Please note that max. length is 16 m.

Prices

If not otherwise stated, the prices given are in Euros (EUR) and based on the assumption that the goods are ordered in minimum consignments of 1000 kg per profile. Taxes, duties, levies, or payments of similar kind are not included in the prices. Prices given are valid for deliveries during a period of one (1) month from the date of the offer.

Terms of payment

Payment of each delivery shall be made against PURSO OY's invoice and prior to the delivery. Open credit is granted only against sufficient guarantees and shall be separately agreed. Interest on overdue payments will be charged at a rate stated at each invoice.

Validity of the offers

If not otherwise stated given prices and conditions are valid for orders one (1) month from the date off the offer.

Execution of orders

Orders for delivery of the goods are to be given in writing. No order is binding without a written acknowledgment from PURSO OY.

Minimum quantities

Minimum ordering quantity of a standard or customized profile is 500 kg. For smaller quantities, a separate setting cost will be charged.

Terms of delivery

If not otherwise agreed prices given are based on the trade terms FCA Siuro, INCOTERMS 2020.

Retention of title rights

Title of the delivered goods shall remain the property of Purso Oy until customer has completely met all its obligations arising from the business relationship. Unpaid Goods to be stored separately at customer. Extended retention of title is effective in countries where applicable according to law, among others in Germany ("erweiter Eigentumsvorbehalt").

Packing

Given prices are including standard export packing, i.e., cardboard box with wooden hoops, plastic wrap and PE carpet between layers.

Deviations in quantity

Ordered amounts are considered approximate quantities only and the delivered quantities may differ from the ordered with +/- 10%, but not less than +/- 50 kg. For components, delivered quantities may differ from order -0/+10%. Invoicing is done according to the delivered quantity.

Remarks and claims

Remarks or claims concerning the delivered goods must be made within 14 days and in transport damages within 7 days from the delivery at the customer. If no remarks have been made during this period, the goods delivered shall be deemed conforming to the order as to quality and quantity.

Drawings

All drawings and models made by PURSO OY are the property of PURSO OY and may not be copied or disclosed to any third party without the written consent from PURSO OY.

Anodized and powder coated profiles

Hanging marks will appear by the sides and at the end of the profiles. In case extra support needed in the middle of profile, might an extra mark appear. Storage of powder-coated, anodised, and raw profiles Surfaces shall be inspected and cleaned at least once within 12 months: washing with a synthetic, neutral (pH 5-8) detergent solution followed by rinsing with clean water at room temperature. For cleaning no mechanical means such as steel wool, steel brushes etc. may be used. Furthermore, neither basic nor alkaline cleaning detergents may be used.

Purso general terms 2023 (PGT-2023)

Extrusion dies

All extrusion dies placed at PURSO OY, whether paid by the customer or PURSO OY, are the property of PURSO OY. Dies for customized profiles are used only by order from the original customer for the profile concerned or with his written consent. Dies will be stored three (3) years after last delivery of the profile whereafter they will be destroyed. By written agreement between the parties, dies can be stored longer period at the expense of customer. All the rights for the dies will cease if the customer will be set up in liquidation, bankruptcy or if the operations ceases. For first delivery produced with new die, no binding time of delivery can be given. New die(s) requires several trials / corrections before it is ready for production.

Test reports

If customer wants test report for each delivery, separate cost will be charged. To be agreed at the latest upon order.

Patents

PURSO OY takes no responsibility for possible patent or copyright violations or other infringements of industrial property rights concerning profiles made according to the customer's model or drawing.

Force majeure

According to Orgalime S2000/NL17 In addition to the reasons mentioned in Orgalime S2000 / NL17, machines or tools and the simultaneous failure of any backup dies in a way that makes contractual ones impossible fulfilling obligations on time.

Other conditions

The contract shall be governed by the substantive law of Finland. Other conditions according to ORGALIME S200, except Scandinavia according to NL17.