


Läpjohtotus kytkentäpäädillä ja kaapelilla
Through wiring with Connection end cap and cable
Genomgående ledning med anslutningsände och kabel
Durchangsverdrahtung mit Anschlussende und Kabel

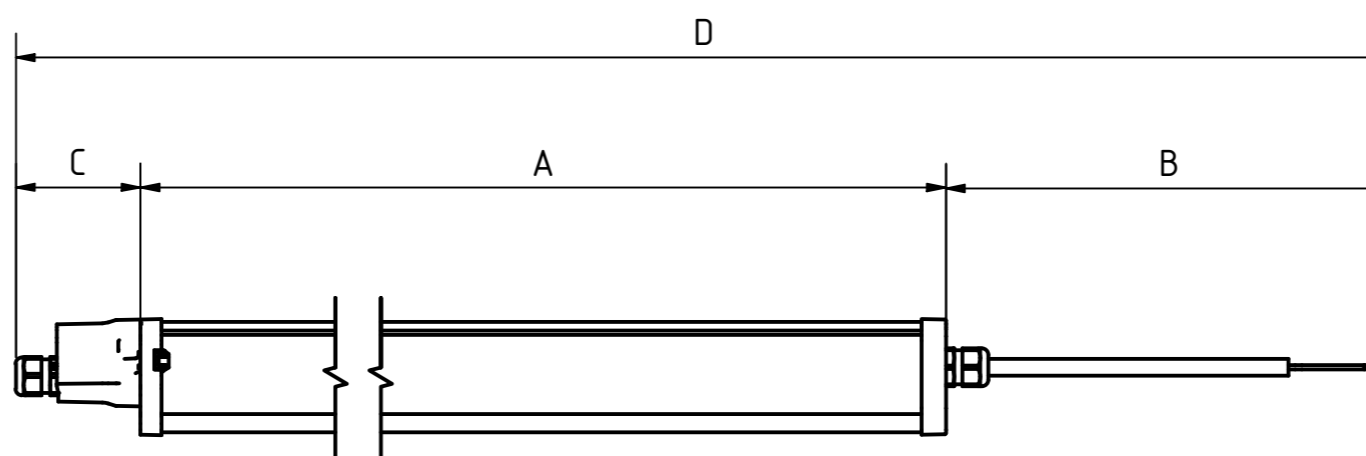


-2C- Cable 2m			
LUMINAIRE (A)	CABLE (B)	CABLE (C)	TOTAL LENGTH (D)
1144	856	85	2085
1423	577	85	2085

-4C- Cable 4m			
LUMINAIRE (A)	CABLE (B)	CABLE (C)	TOTAL LENGTH (D)
1144	2856	85	4085
1423	2577	85	4085
2262	1738	85	4085

-6C- Cable 6m			
LUMINAIRE (A)	CABLE (B)	CABLE (C)	TOTAL LENGTH (D)
1144	4856	85	6085
1423	4577	85	6085
2262	3738	85	6085

Cables		
Code	Description	Cable type
-2C-	5x2,5mm ² , 2m PVC	H05VV-F 5G2.5
-4C-	5x2,5mm ² , 4m PVC	H05VV-F 5G2.5
-6C-	5x2,5mm ² , 6m PVC	H05VV-F 5G2.5
-2C-HF	5x2,5mm ² , 2m HF	H05Z1Z1-F 5G2.5
-4C-HF	5x2,5mm ² , 4m HF	H05Z1Z1-F 5G2.5
-6C-HF	5x2,5mm ² , 6m HF	H05Z1Z1-F 5G2.5
-2C-R	5x2,5mm ² , 2m VSN	H07RN-F 5G2.5
-4C-R	5x2,5mm ² , 4m VSN	H07RN-F 5G2.5
-6C-R	5x2,5mm ² , 6m VSN	H07RN-F 5G2.5
-2C-RHF	5x2,5mm ² , 2m VSN HF	H07ZZ-F 5G2.5
-4C-RHF	5x2,5mm ² , 4m VSN HF	H07ZZ-F 5G2.5
-6C-RHF	5x2,5mm ² , 6m VSN HF	H07ZZ-F 5G2.5
-2C-DA	5x2,5mm ² , 2m PVC	H05VV-F 5G2.5
-4C-DA	5x2,5mm ² , 4m PVC	H05VV-F 5G2.5
-6C-DA	5x2,5mm ² , 6m PVC	H05VV-F 5G2.5
-2C-HFDA	5x2,5mm ² , 2m HF	H05Z1Z1-F 5G2.5
-4C-HFDA	5x2,5mm ² , 4m HF	H05Z1Z1-F 5G2.5
-6C-HFDA	5x2,5mm ² , 6m HF	H05Z1Z1-F 5G2.5
-2C-RDA	5x2,5mm ² , 2m VSN	H07RN-F 5G2.5
-4C-RDA	5x2,5mm ² , 4m VSN	H07RN-F 5G2.5
-6C-RDA	5x2,5mm ² , 6m VSN	H07RN-F 5G2.5
-2C-RHFDA	5x2,5mm ² , 2m HF	H05Z1Z1-F 5G2.5
-4C-RHFDA	5x2,5mm ² , 4m HF	H05Z1Z1-F 5G2.5
-6C-RHFDA	5x2,5mm ² , 6m HF	H05Z1Z1-F 5G2.5

Pituus (D) toleranssi ±0,1m
 The stated length (D) tolerance ±0,1m

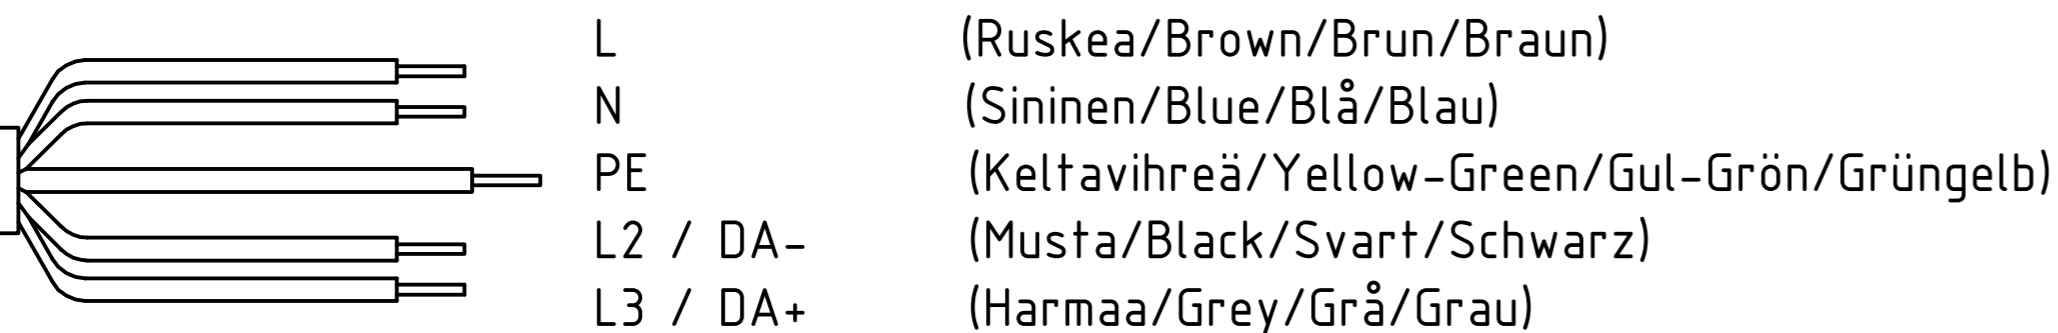

HUOM!
 Pituus (D) on maksimimitta, jonka kullakin kaapeliparilla voi saavuttaa.
 On suositeltavaa jättää tarvittava pelivara asennukselle (esim. jos kaapelia täytyy taivutella, kiertää esteitä tms.).

ATTENTION! Length (D) is the absolut maximum through-wiring distance.
 It is adviced to leave some leeway for assembling (e.g. if the cable needs to be bend etc.).

Esimerkkejä kaapelivalinnoista:
 Examples of cable codes:
 -2C- (Cable 2m, H05VV-F, PVC)
 -4C- HF (Cable 4m, H05Z1Z1-F, halogen-free)

Cable insulation options	Code
MSK / PVC / H05VV-F	
MSK / PVC / H05VV-F	DA
MSK / HF / H05Z1Z1-F	HF / HFDA
VSN / VSKB / H07RN-F	R / RDA
VSN / VSKB / H07ZZ-F	RHF / RHFDA